

## Decision Support using Mission Simulation and Modeling Tools

10 January 2007

Gerald R. Larocque, Ph.D. R. Taylor Locke Timothy J. Dasey, Ph.D

> (781) 981-5843 larocque@ll.mit.edu

This work was sponsored by the Defense Threat Reduction Agency under Air Force Contract FA8721-05-C-0002. Opinions, interpretations, conclusions and recommendations are those of the author and are not necessarily endorsed by the United States Government.

MIT Lincoln Laboratory

Larocque-1 CBIS 3/30/2007



- Provide tools to support mission model application
  - Model agnostic to extent possible
  - Guide data gathering and input scenario definition
  - Eventual Goal: Integration with JOEF (Joint Operational Effects Federation)
- Explore suitable mathematical approaches
  - Statistical tools for experimental design
  - Mathematical/statistical methods for results analysis
  - Eventual Goal: Automated optimization of alternatives



- CB Protection requires complex decisions, e.g.,
  - Placement of critical assets
  - Deployment of sensors
  - Policy regarding MOPP usage
- JOEF contains a sophisticated Discrete Event Simulation model for CB effects on military missions
  - Application to many practical situations may be complex due to detailed simulation processes
     Rapid data acquisition may be difficult


Definition of appropriate scenario set may not be apparent


- Analysts may sometimes lack resources to apply JOEF simulation applications efficiently
  - Complex questions requiring numerous runs
  - Inability to obtain sufficient, accurate data
  - Short time to implement (Order of 1-2 weeks <u>at most</u>)



## Simulation as Complex Decision Support

- Simulation predicts critical MOE under scenarios reflecting mission goals
- MOE comparisons drive decision outcome
- Large numbers of variables, scenarios and limited time are critical challenges
- Efficient "experiment" design may allow more effective/complete simulation by reducing number of combinations required

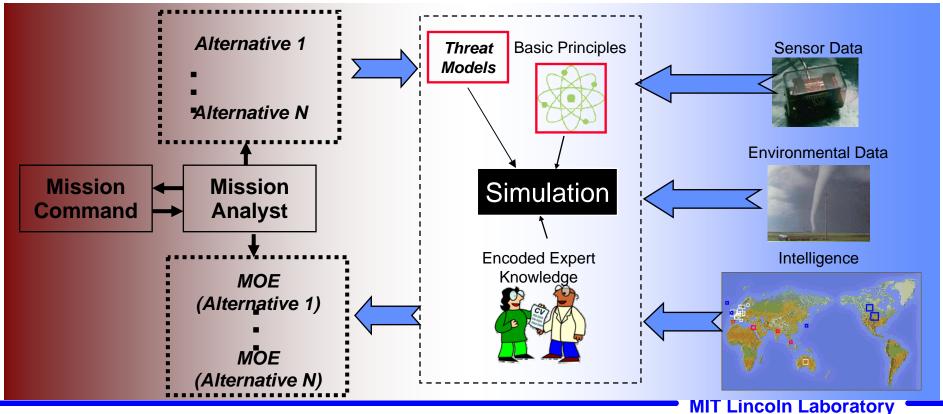

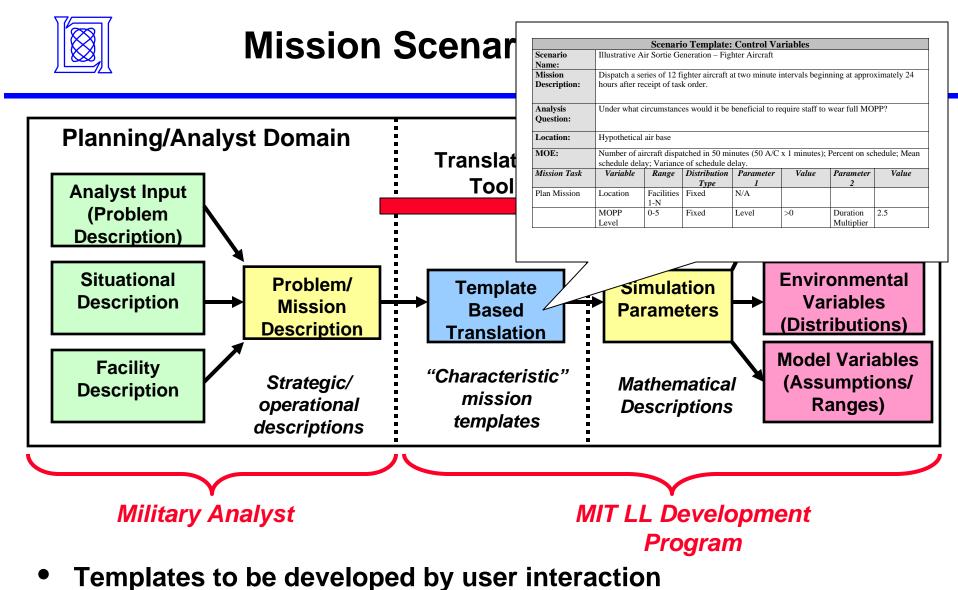


- Interviews with candidate users
  - Specified as "templates" of typical model applications

**MIT Lincoln Laboratory** 




## **CB** Decision Flow

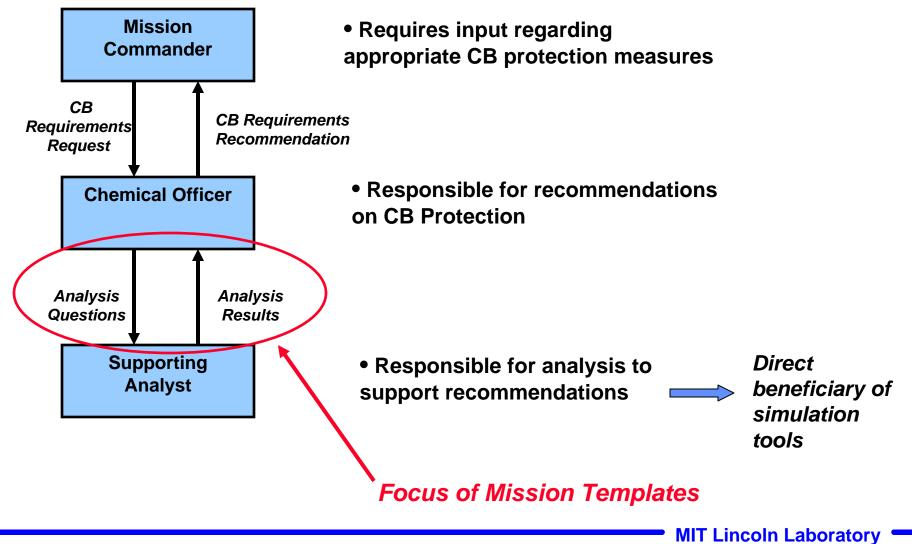



#### **MIMIC\* System Concept**

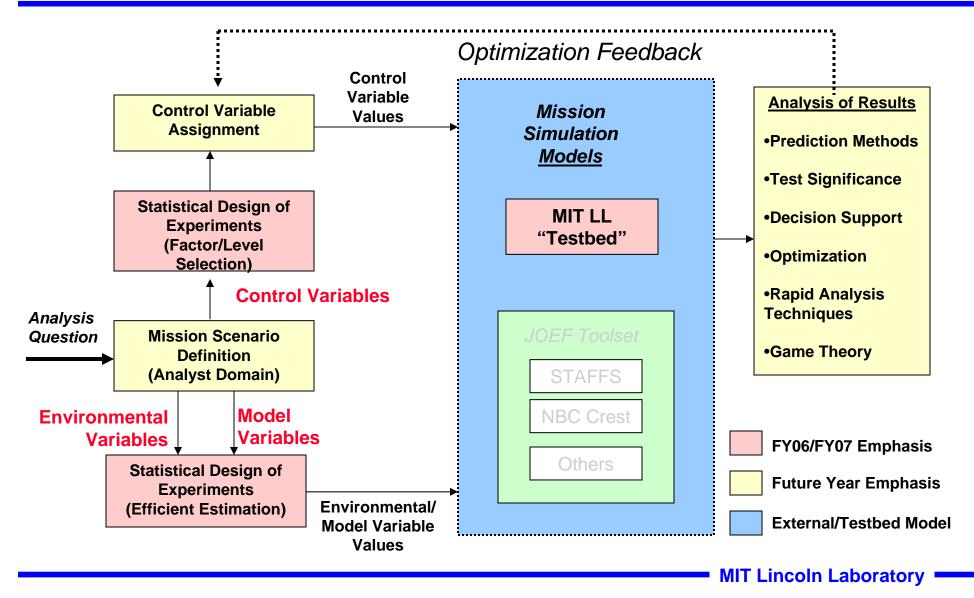

Larocque-7 CBIS 3/30/2007 \* Mission Impact Model for Incident Characterization




- Mathematical techniques to enhance experimental efficiency
  - Represents "Gold-standard" for testing cause and effect relationships
  - Reduces required number of experiments
    Grows rapidly with number of variable/levels
    Just 10 variables at 2 levels requires ~1000 tests to explore effects fully
  - Controls loss of information
    - Reduces number of experiments
    - Provides prior knowledge and selection of information loss
- Widely applied in numerous applications
  - Industrial experiments
  - Laboratory experiments
  - Medical trials
  - Agricultural
  - Software validation testing
- Application to simulation input designs is relatively recent theory
  - Most literature within past decade




## **MIT LL Testbed**

- Simple simulation model
  - Applied as surrogate for more sophisticated tools during development
  - Interfaced to existing hazard model (HPAC/JEM)
- Illustrative mission is aircraft sortie generation
  - Major steps to dispatch aircraft
  - Rough parameter estimates (accuracy not necessary for developmental purposes)

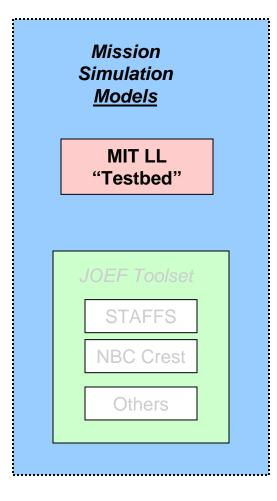



## **MIT LL Testbed Architecture**

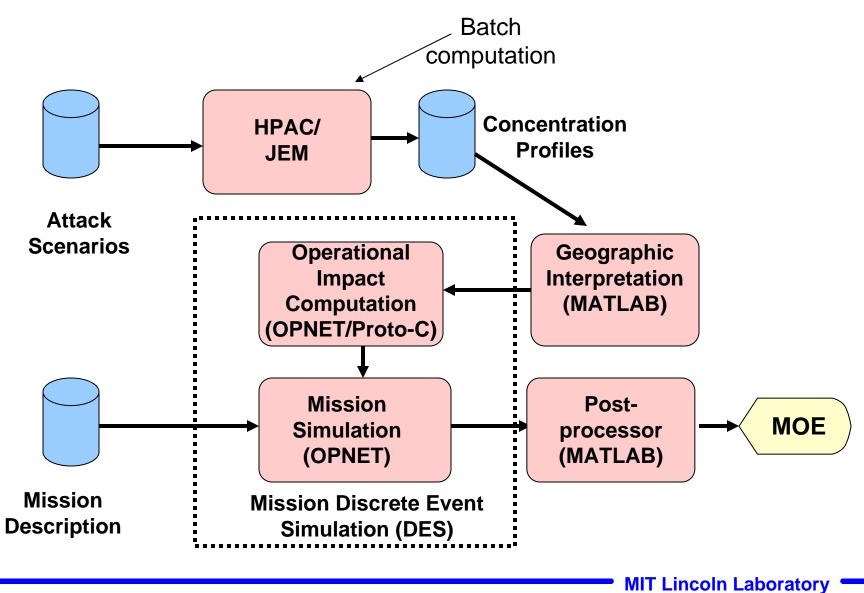


Larocque-10 CBIS 3/30/2007



## **Initial Mission Simulation**

- Mission definition:
  - Dispatch 20 fighter aircraft
  - Schedule departures at 1 minute intervals, starting 12 hours after task order
  - Total mission duration 24 hours
- Selected MOE:
  - Number of flights departed
  - Mean delay in flight departure
  - Percentage of flights departing on time

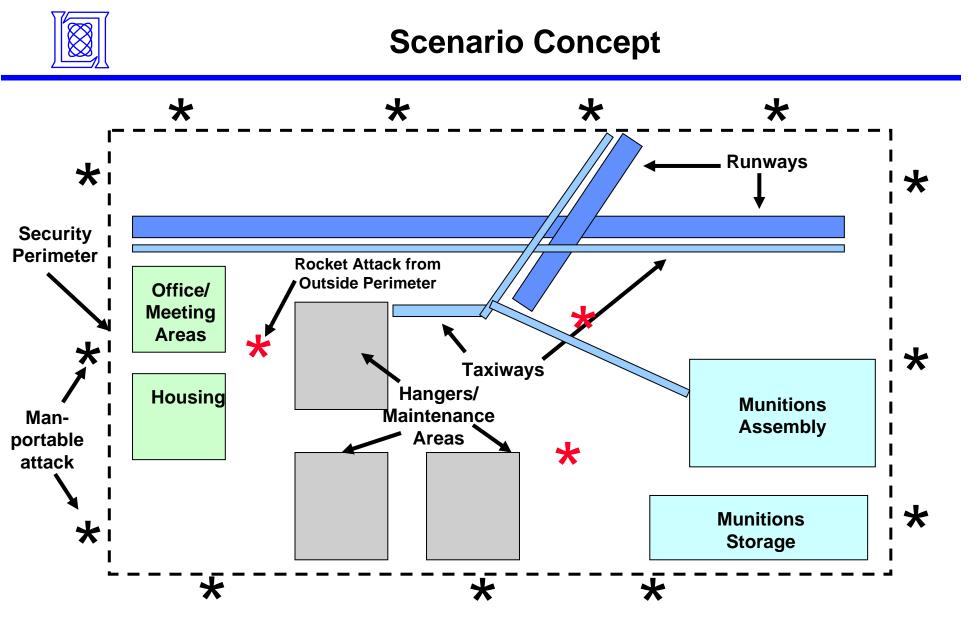


• MIT Lincoln Laboratory

Larocque-12 CBIS 3/30/2007




#### Preliminary Mission Structure – Fighter A/C Departure

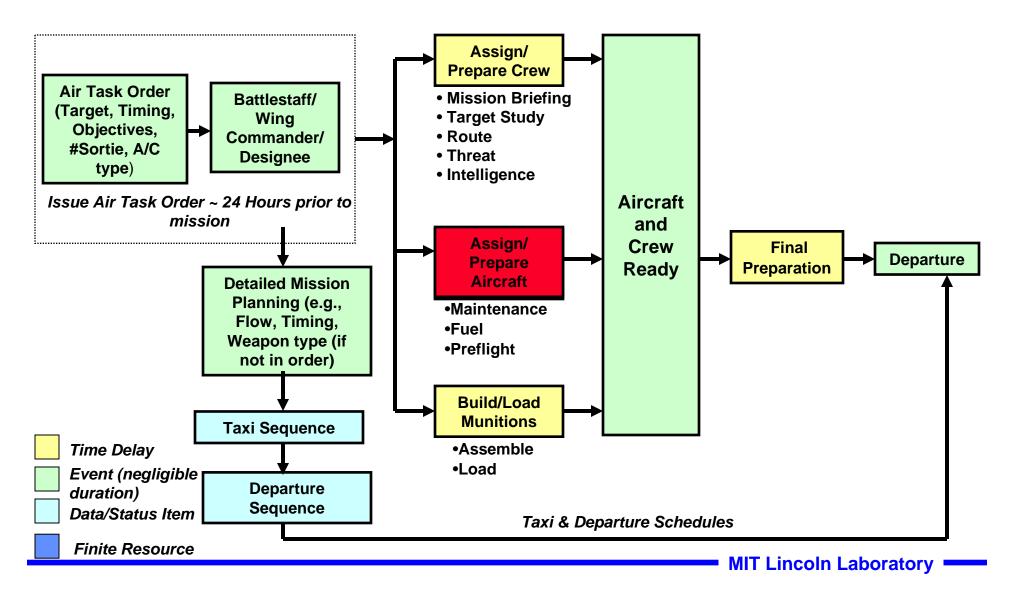



#### Preliminary Mission Structure – Aircraft Preparation Detail

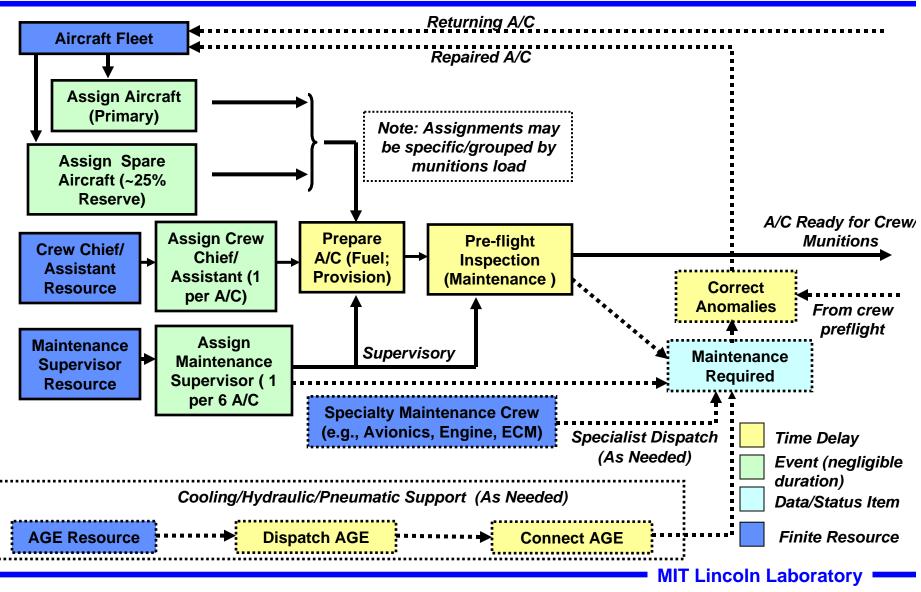




- Initial analysis considers alternative MOPP deployment policies
  - Not deployed for <u>any</u> mission
  - <u>All</u>critical missions
  - <u>All</u> critical missions during <u>heightened alert</u> Alert level established by intelligence
  - Operations in <u>"high-risk" areas</u>
    E.g., near facility perimeter
    Areas to be identified using threat simulations
  - Operations in <u>"high-risk" areas only during heightened alert</u>
- Implication of MOPP usage
  - Simple tasks require 1.5 times nominal time to complete
  - Complex tasks require 2.5 times nominal time to complete
  - MOPP assumed to provide complete protection

**Current presentation** 

**MIT Lincoln Laboratory** 




## Simulation Parameters for Example Mission

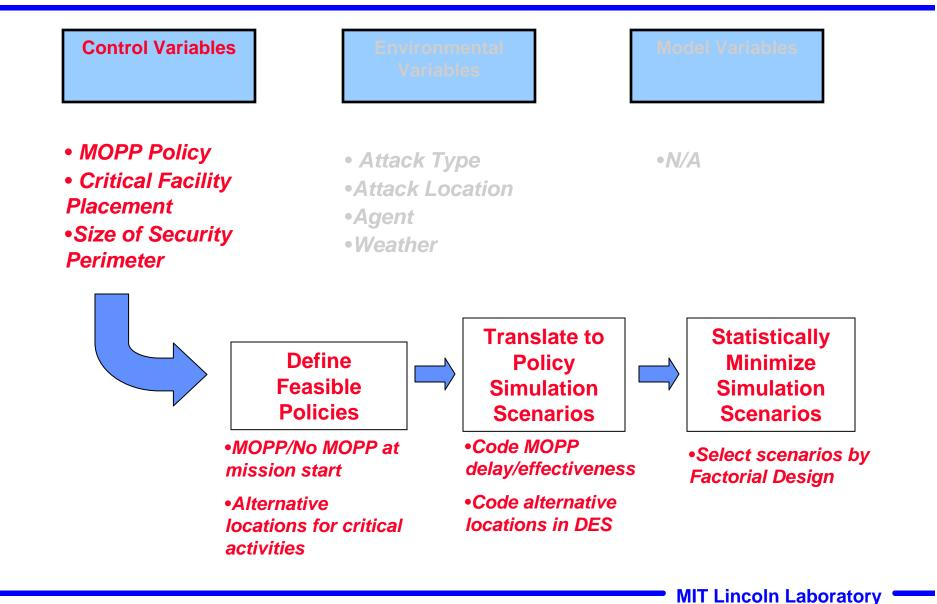



## Simulation Parameters for Example Mission

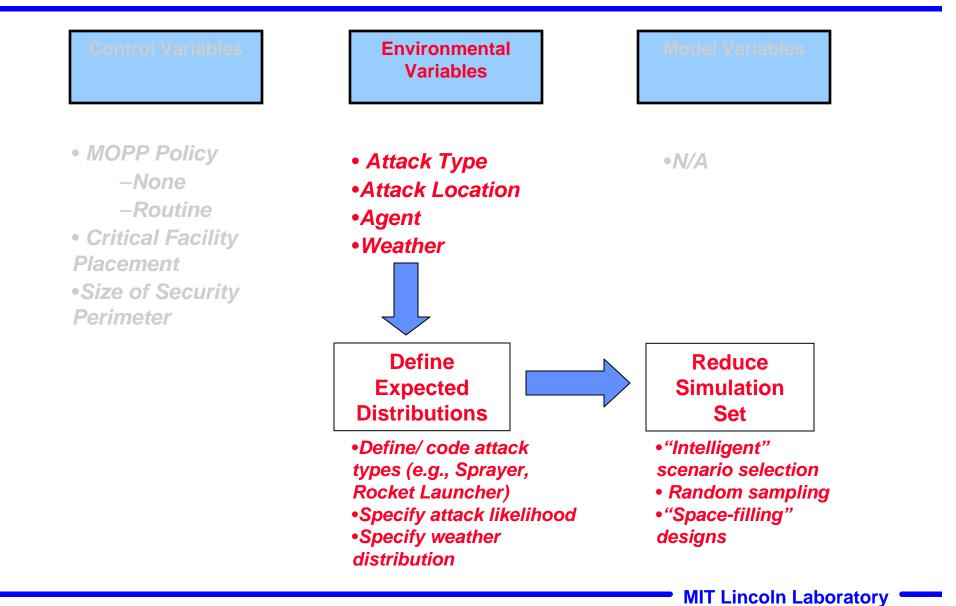



## **Random Attack Model**

## Random sampling of attack space is inefficient


Intelligent sampling of attack space is more appropriate

- Case 1: "Random" (40) attacks, distributed evenly around the security perimeter
  - Majority of attacks (97.5 %) affected areas in which no people or critical actions were taking place
  - Minimal effect on mission predicted
  - Assumes little to no planning/intelligence by attacker
- Case 2: "Intelligent" attack set, directed at operational and/or populated areas
  - All of the attacks affected at least one area important to the mission
  - Mission effect much more significant
  - Likely more realistic representation of potential attack threat

Future efforts will examine applicability of statistical techniques to enhance simulation efficiency (i.e., reduce number of scenarios)




### Illustrative Attack Plumes (Backpack Sprayer)

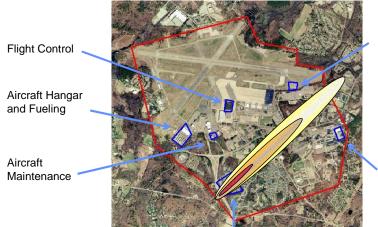

Personnel and Meetings

Munitions Loading and Arming

Munitions and Munitions Construction Consequence is highly dependent on attack location and wind direction.

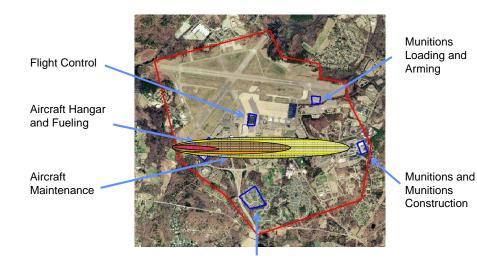

Personnel and Meetings

**MIT Lincoln Laboratory** 

Larocque-19 CBIS 3/30/2007



## Average Predicted MOE (Illustrative Example)

Scenario	Mean Departure Delay (Minutes)	Departures on Schedule (Percent)	Average Flights Departed	Max Sortie Generation Rate** (Sorties/ Minute)
No Attack*	0.1	92.7%	20	0.2
Sprayer* Attack	16.1	87.8%	19.1	0.2
Rocket* Attack	32.3	83.8%	18.2	0.2
Always in MOPP	73.8	0.06%	20	0.08

\* Without MOPP


\*\*Predicted maximum possible rate based on ability to prepare aircraft for mission

Based on simple averages, using MOPP at mission start causes more delay than worst case attack......BUT...

**MIT Lincoln Laboratory** 



# Example Decision Issues (Illustrative Example)

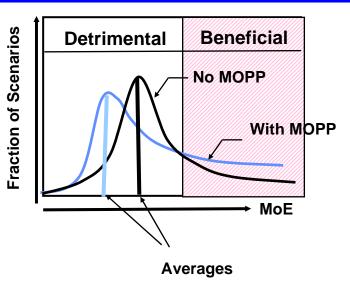


For the example case, approximately 10% of attacks affected critical facilities sufficiently to benefit from MOPP application

- On average, MOPP is detrimental in terms of delay
- Application of MOPP increases variability in MoE



Well targeted attacks can cause much worse delays than MOPP



- Effective decision strategies must consider not only average performance, but consequences of specific scenarios
  - Likelihood of attack on most critical ("worst case") operations
  - Information fusion techniques may be applicable



- Core program objective is to provide tools to enhance simulation application and result analysis
  - Agnostic to particular mission simulation tools
  - Eventual integration into JOEF suite
- Initial activities have provided a "testbed" simulation tool and concepts for mathematical toolset
  - Discrete event simulation for illustrative mission linked to hazard assessment tool
  - Provides an example against which to test candidate scenario design and analysis concepts
- Interviews are in progress to characterize key decision processes and possible roles of simulation
  - Advance understanding of potential JOEF applications
  - Guide development of supporting mathematical tools
  - Delineate key issues in interpreting simulation outputs