

Towards low-cost TATB-based formulations

A. Wuillaume, E. Pasquinet, E. Grech,
A. Beaucamp

CEA, DAM, Le Ripault, F-37260 Monts, France

Financially supported by



Context of the study

- TATB is an attractive insensitive explosive:
 - it satisfies safety requirements at high temperatures
 - it resists to accidental initiation and explosion
- The current cost of TATB makes it unusable in conventional weapons



Development of low cost TATB-based formulations by acting on:

- cost of the TATB synthesis
- TATB ratio in formulations, without damaging the energetic characteristics (safety, performances, ...)

Low-cost TATB

- ✓ evaluation of known methods
- ✓ development of the DCA route

New TATB-based formulations


- ✓ safety tests

Conclusion and Prospects

Low-cost TATB - Evaluation of known methods

- New synthesis: a first evaluation gave poor results
- Five significant synthetic routes:


Benziger (1977)



☺ industrial process
(France)

☹ harsh reaction conditions
→ high cost


Atkins (1981)



☺ cheap starting material

☹ sensitive intermediate
(pentanitroaniline)

Mitchell (VNS chemistry) (1996)




☺ high yield

☹ environmentally non
friendly, expensive reactant




Bellamy (2001)



☺ high yield
No Chlorine product

☹ expensive starting
material

Ott (1990)








☺ high yield and soft
reaction conditions

☹ expensive starting
material

Low-cost TATB - Evaluation of known methods


- New synthesis: a first evaluation gave poor results
- Five significant synthetic routes:

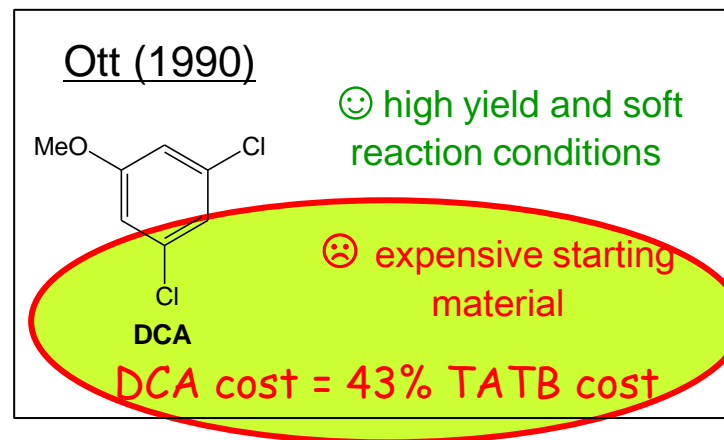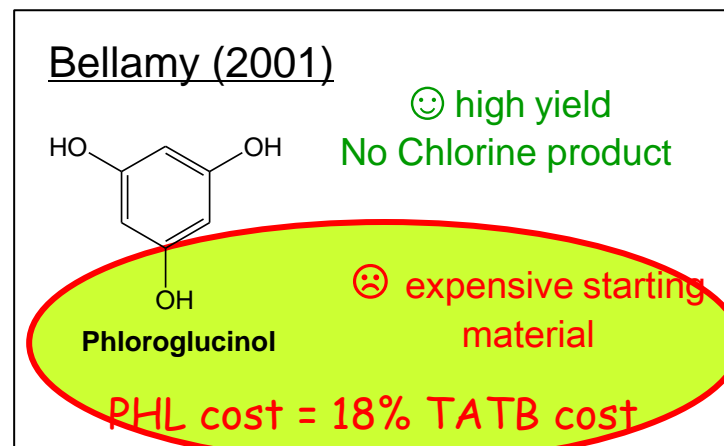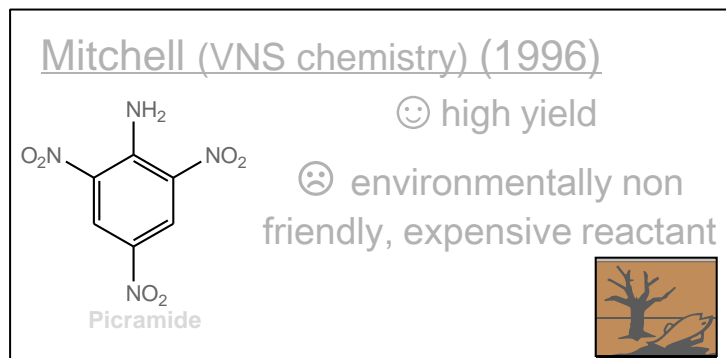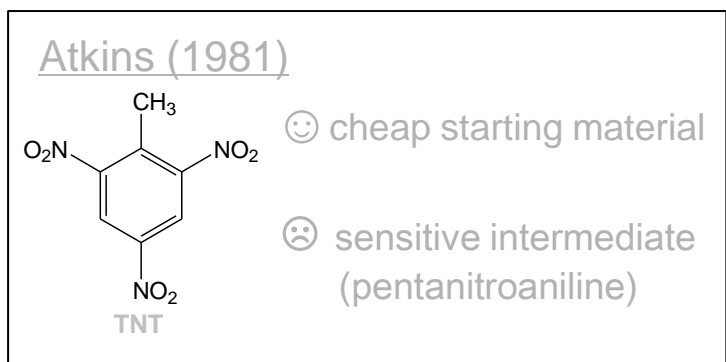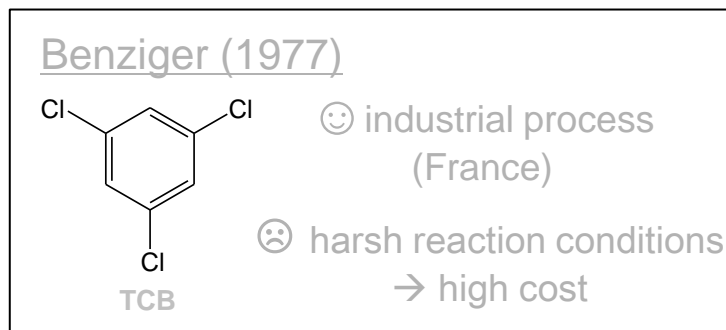

Low-cost TATB - Evaluation of known methods

- Phloroglucinol synthesis: few methods are attractive for cost studies:


- Biochemical route:

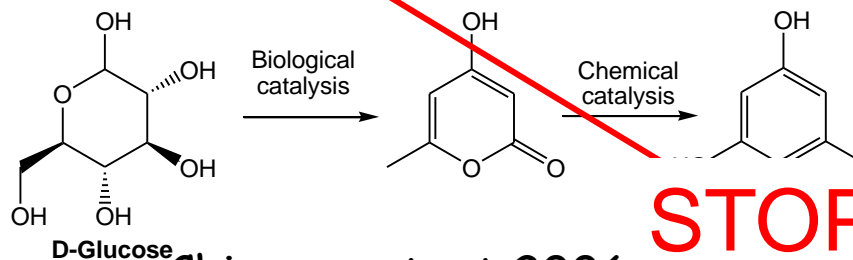

Specific technology not available


STOP

- Chinese patent 2006 (1,2,4-trichlorophenol)

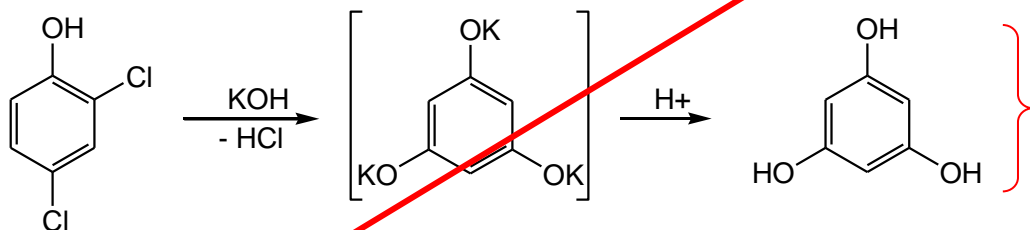

Different attempts = no good result

- DCA synthesis: Testaferri L., Tetrahedron, 1983, 39(1),193-197

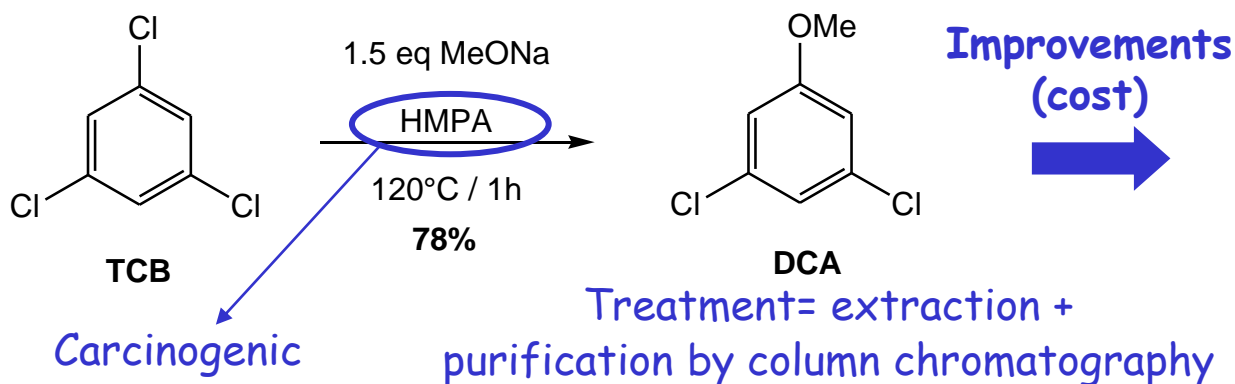

- solvent
- treatment of RM
- improvement of reaction parameters (concentration, duration, temperature, ...)

Carcinogenic

Low-cost TATB - Development of the DCA route


➤ Improvement on the laboratory scale

➤ Solvent:

✓ Low conversion: MeOH, THF, CH₃CN

✓ Good yield: tetramethylurea, NMP, **DMSO**

expensive teratogenic

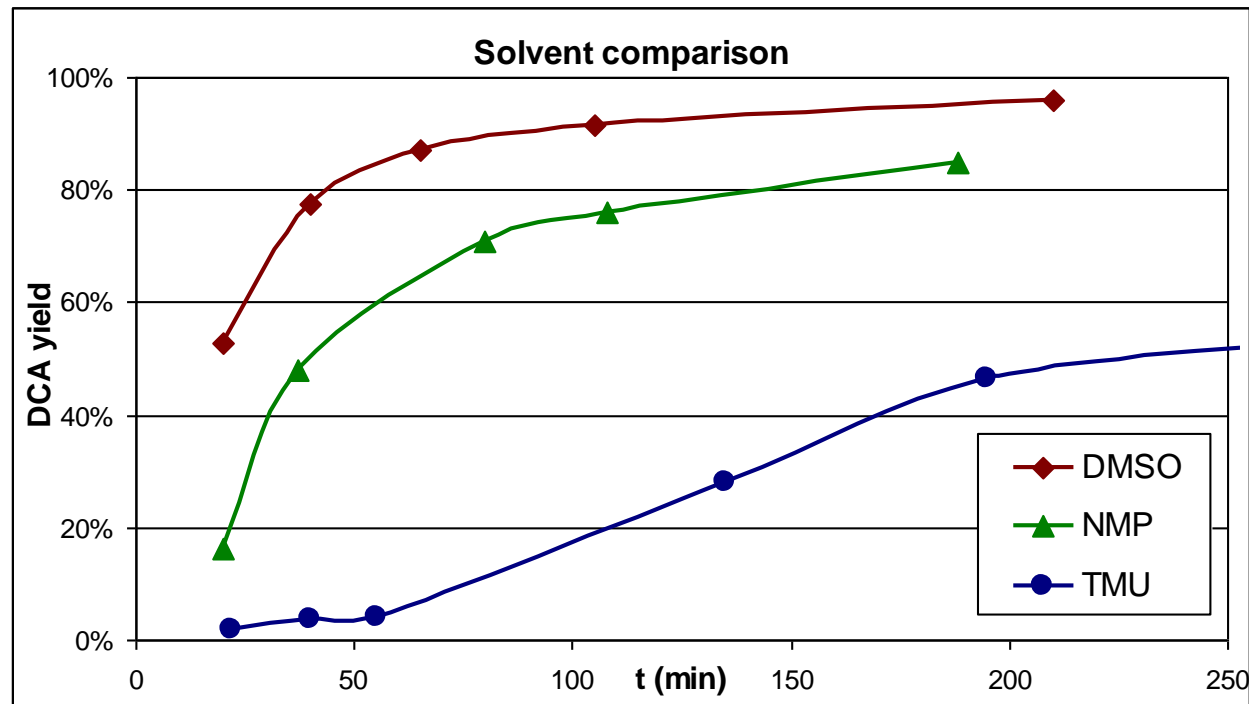


Low-cost TATB - Development of the DCA route

➤ Improvement on the laboratory scale



➤ Treatment / product isolation:

- ✓ DCA precipitates upon dilution with water
- ✓ Crude product is pure enough (96% by NMR)

- ✓ Yield = 91% (20g scale)

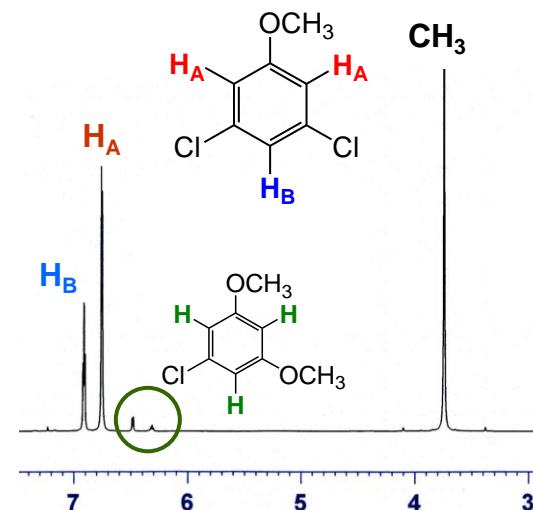




➤ Development of a GC/MS method: to follow conversion during reaction

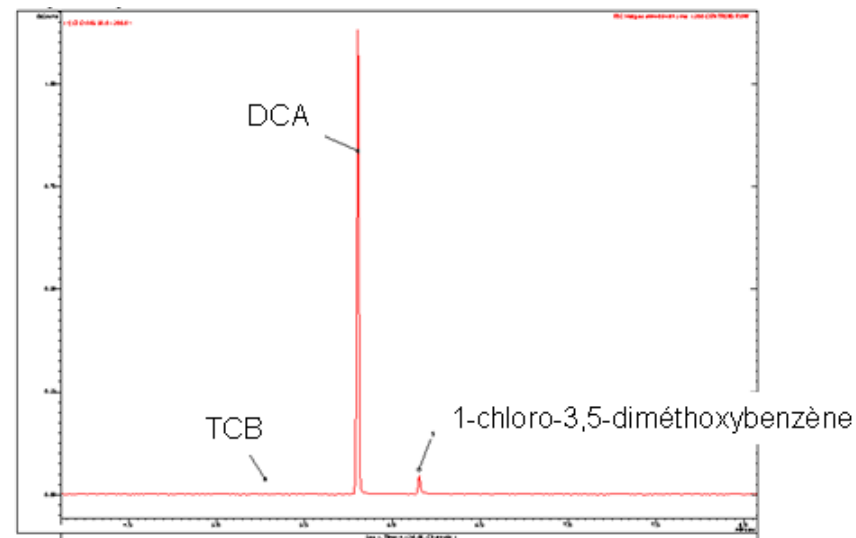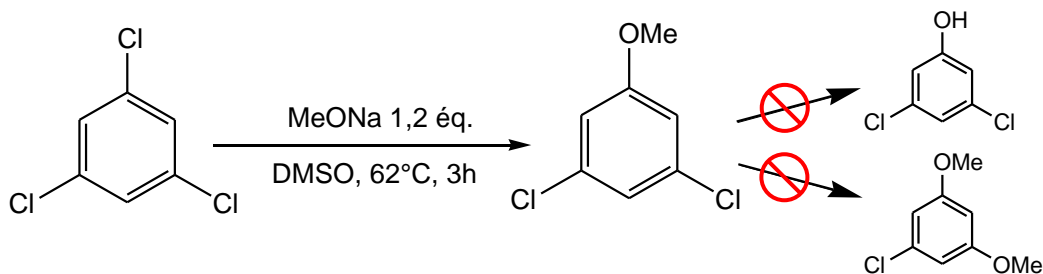

Low-cost TATB - Development of the DCA route

➤ Improvement on the laboratory scale

➤ RM concentration and reaction duration:

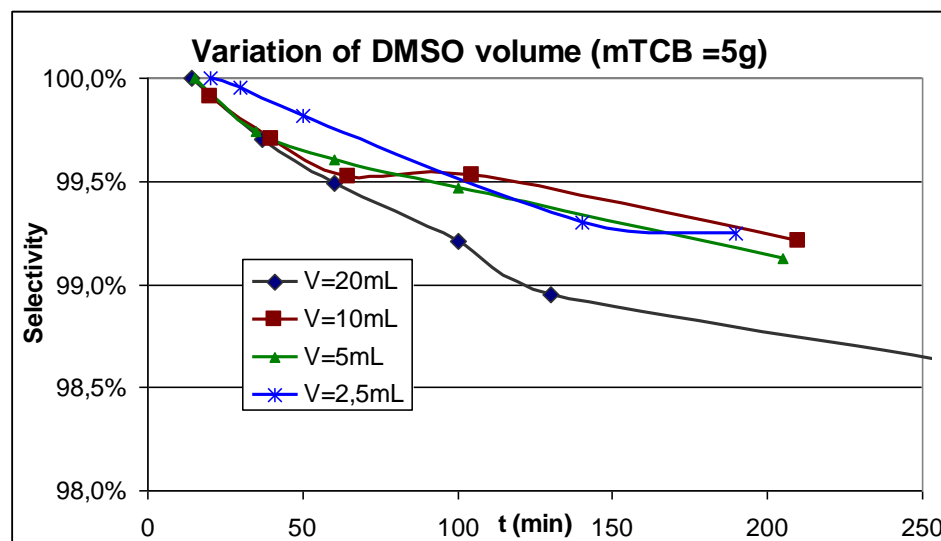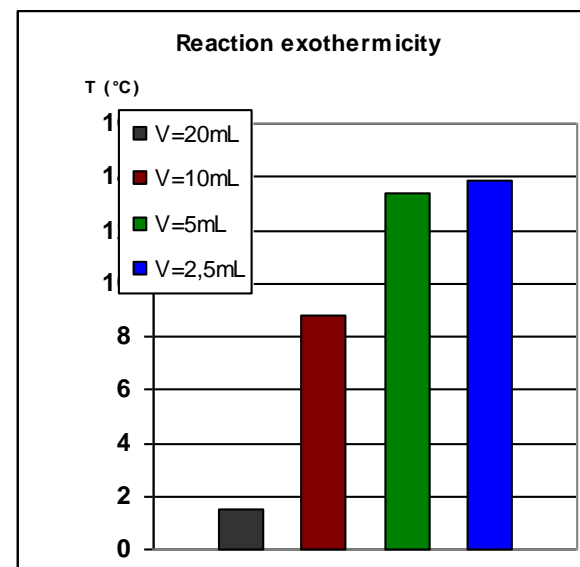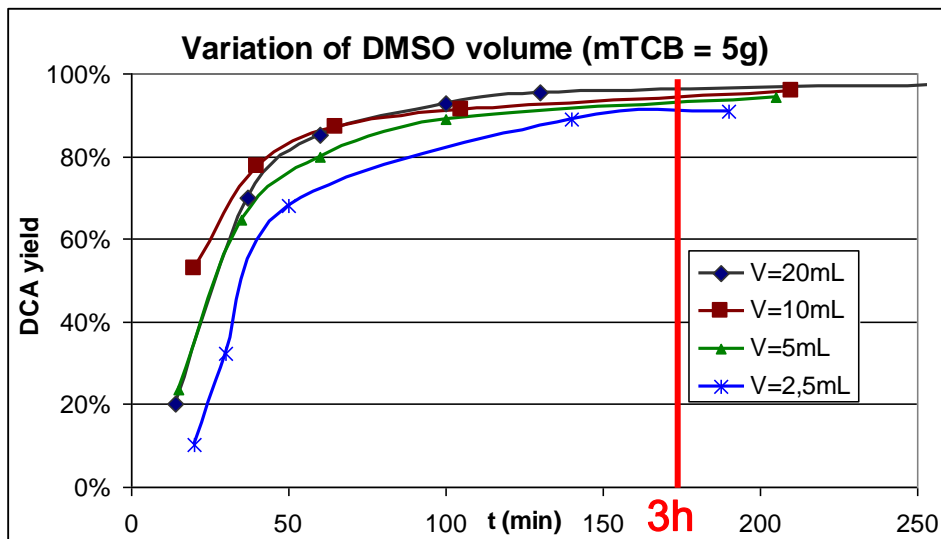

Ratio $m_{TCB}/V_{DMSO} = 0,5$
(yield, selectivity, exotherm, cost)

Reaction duration: 3h00

Low-cost TATB - Development of the DCA route

➤ Improvement on the laboratory scale


➤ Temperature control (precursors addition order): best control was obtained by addition of $\text{TCB}_{(s)}$ in a suspension of $\text{MeONa}_{(s)}$ in DMSO at 62°C

➤ Water volume for DCA precipitation

Water volume	Yield (%)	Purity by GC (%)
$10 \times V_{\text{DMSO}}$	96	95
$5 \times V_{\text{DMSO}}$	97	95
$3 \times V_{\text{DMSO}}$	97	95





Productivity and cost improvement

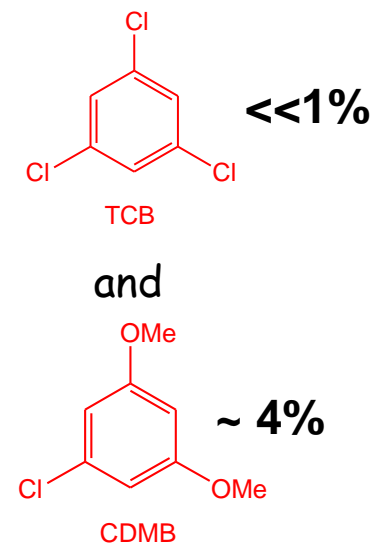

Low-cost TATB - Development of the DCA route


➤ Scale up and summary

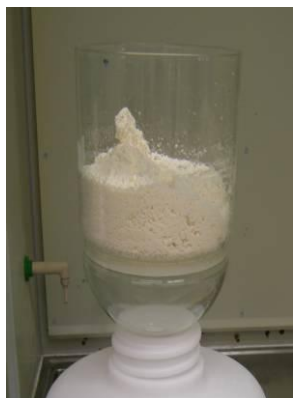

Patented in January 2010




>90% yield
 >90% purity

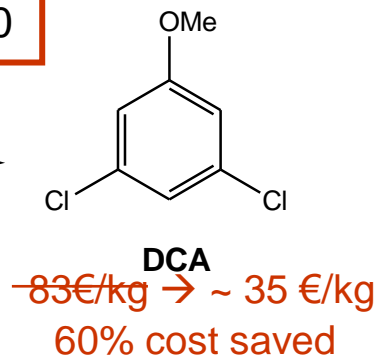

- ✓ Use of a non-carcinogenic solvent
- ✓ Simple isolation of the product (dilution + filtration)
- ✓ No further purification
- ✓ High yield and purity (1kg scale)


➤ Validation laboratory-made DCA in TATB synthesis

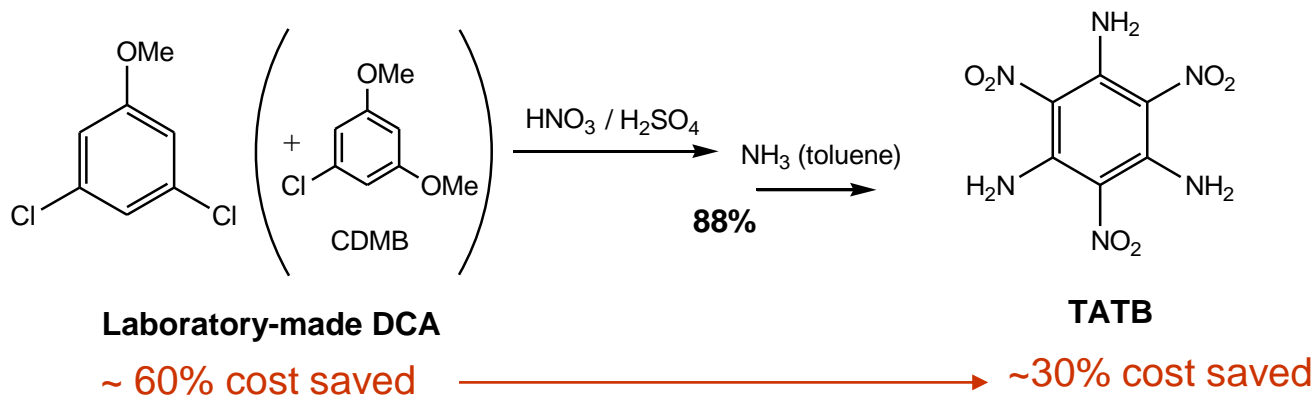

New TATB-based formulations

➤ Approach:

- Decrease TATB ratio in TATB/HMX/binder formulations

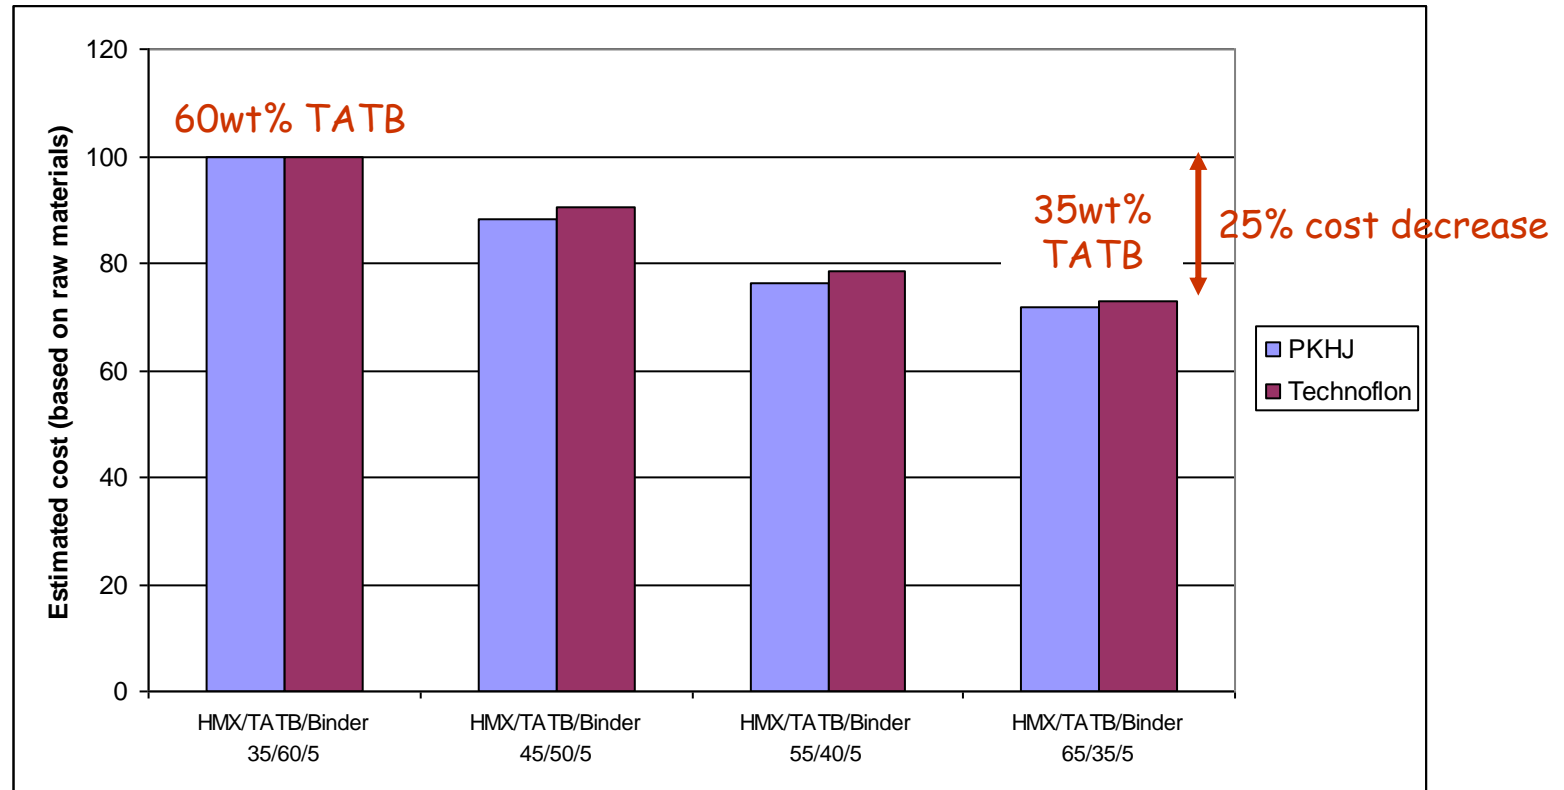

- Preserve as much as possible the overall performances (safety, energetic and mechanical properties)



Influent parameters :

- nature and ratio of binder
- HMX ratio

New TATB-based formulations - Safety tests

➤ Influence of binder nature and ratio on impact sensitivity:

- ✓ Apparatus: Pendular fallhammer Sorgues (5kg)
- ✓ Formulations prepared (200g scale):

N°	HMX wt%	TATB wt%	Binder wt%	H ₅₀ (cm)
1	45	49	PKHJ* 6%	52
2	45	52	Cariflex** 3%	54
3	45	45	Cariflex** 10%	61
4	45	52	Technoflon*** 3%	46

* PKHJ: phenoxy binder (d = 1,18)

**Cariflex: copoly(styrene/diene) (d = 0,94)

***Technoflon (fluoropolymer) (d = 1,8)


- Only weak influence of the binder nature and ratio on the impact sensitivity

- Slightly lower sensitivity with 10% Cariflex but energetic performances may be affected at this level (low density)

New TATB-based formulations - Safety tests

➤ Influence of HMX ratio on impact sensitivity:

- ✓ Apparatus: Pendular fallhammer Sorgues (5kg)
- ✓ Formulations prepared (wt% binder = 3) (200g scale):

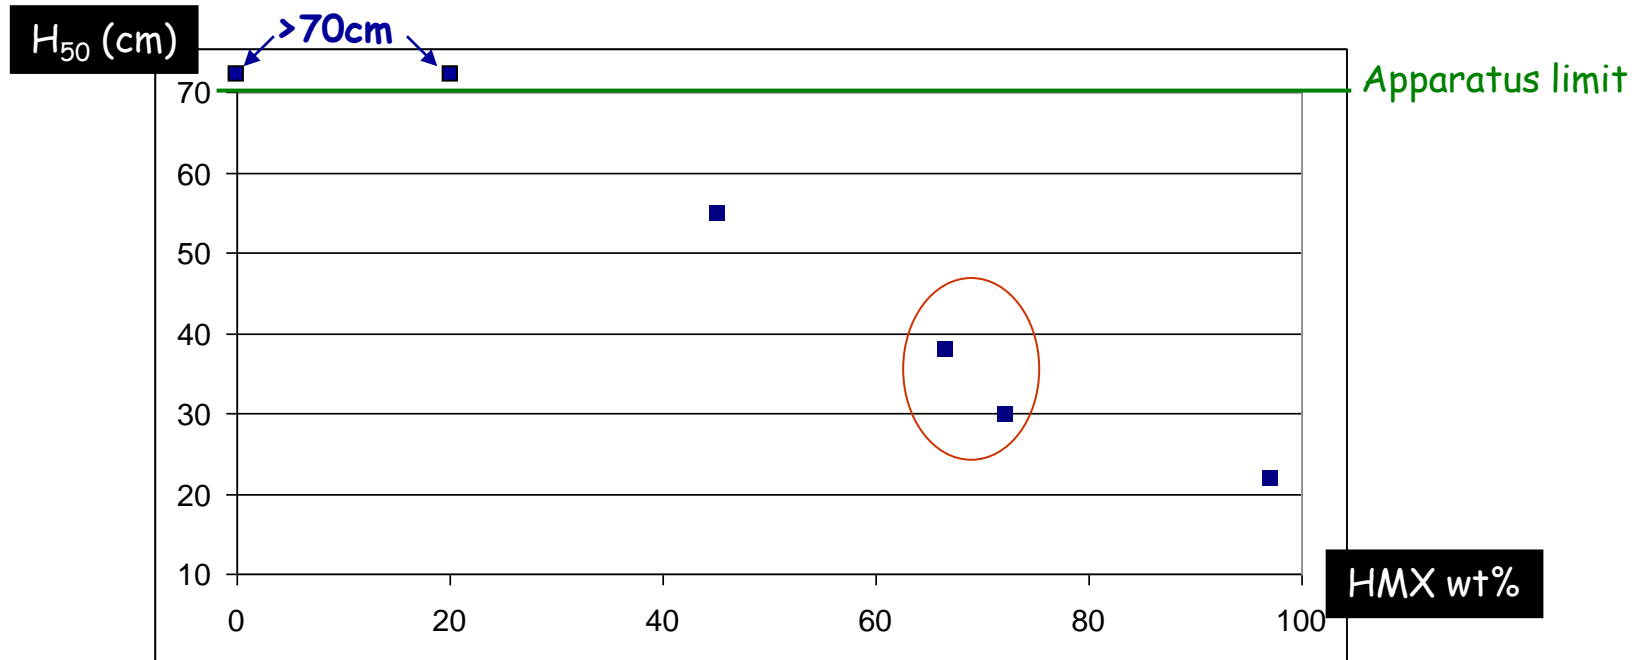

2 compositions were selected for first energetic characterizations:

- HMX/TATB/technoflon 65/30/5
- HMX/TATB/PKHJ 66,3/30,5/3,2

New TATB-based formulations - Safety tests




➤ Closed-chamber experiments:

➤ Combustion behavior:

5 samples of 9g
 $P = f(t)$ was measured



Evaluation of the Combustion
 Deflagration Detonation
 Transition (CoDDT) danger

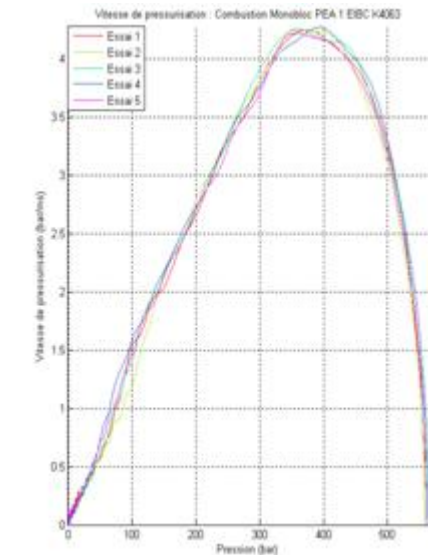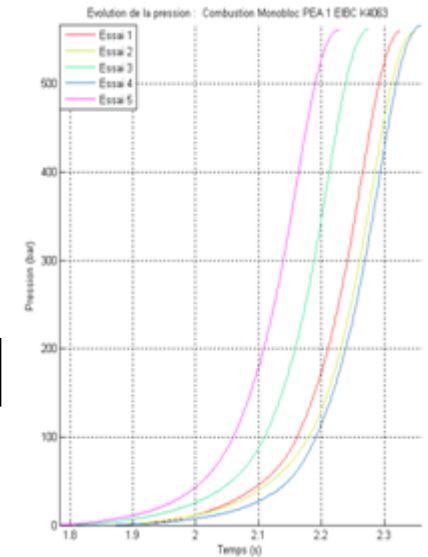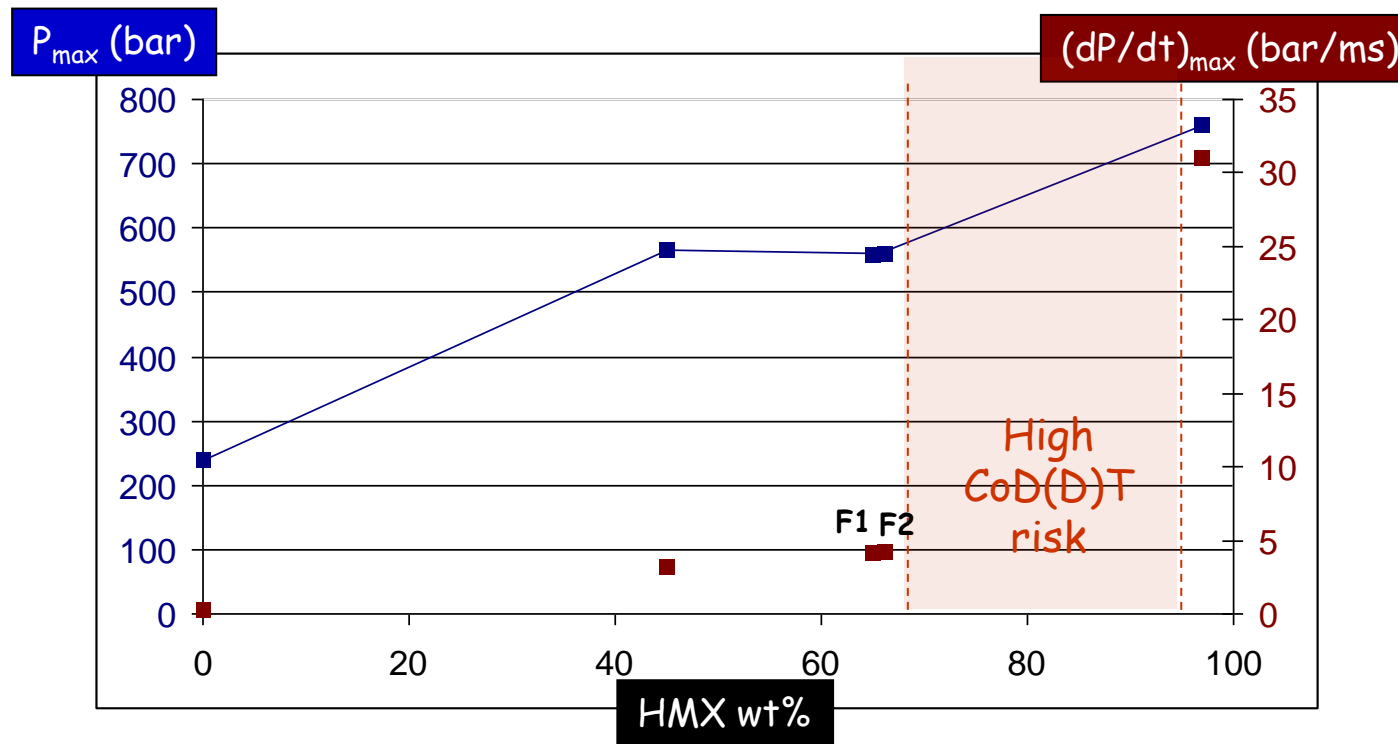

- ✓ P_{max} : increase of HMX wt% → increase of the burning rate
- ✓ $(dP/dt)_{max}$: if HMX < 65wt% linear relation between HMX_{wt%} and $(dP/dt)_{max}$
 if HMX > 65wt% high risk of CoD(D)T
- ✓ The two formulations have a good combustion behavior

New TATB-based formulations - Safety tests


➤ Closed-chamber experiments:

➤ Friability test:

- 1 sample of 9g thrown (150m/s) towards a steel surface
- fragments combustion in 130 cm³ vessel
 - $P = f(t)$ was measured




UNO threshold for Extremely Insensitive Detonating Substances (EIDS):
 $(dP/dt)_{max} = 150 \text{ bar/ms}$

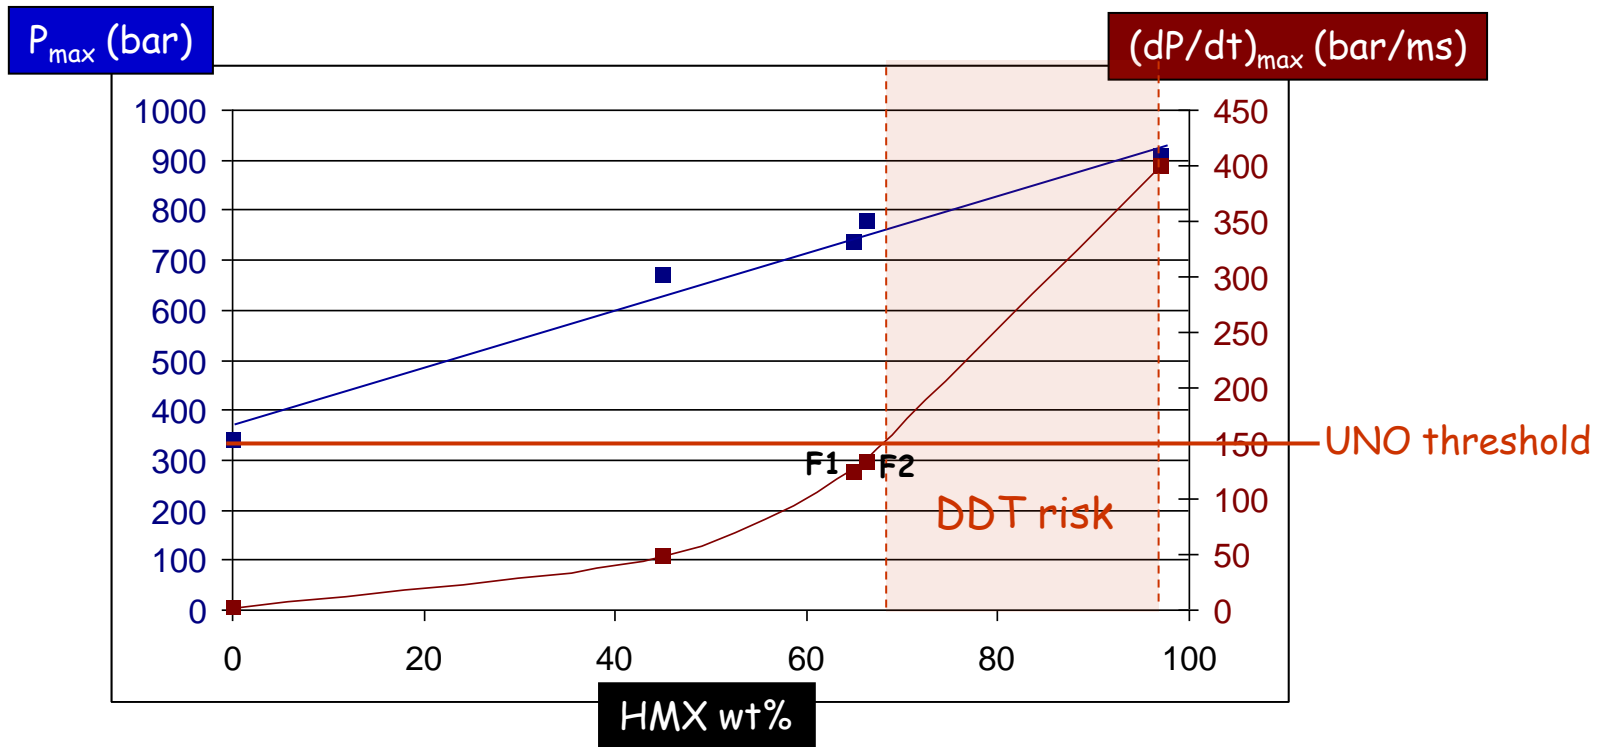

- ✓ P_{max} : increase of HMX wt% → increase of the burning rate (linear relation)
- ✓ $(dP/dt)_{max}$: if HMX > 65wt% high risk of DDT
- ✓ The two formulations studied succeed the friability test

New TATB-based formulations - Safety tests

➤ Small-scale gap test:

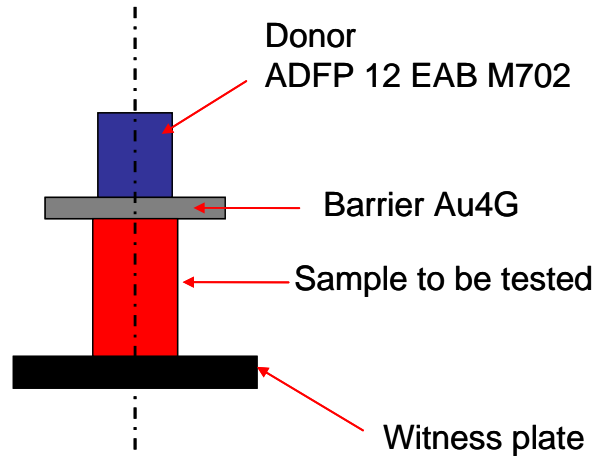

- 30 to 50 tests (Up-and-down method)
- Determination of the barrier thickness (e_{50}) driving to the sample initiation probability of 50%

Formulation	Reference (45wt% HMX)	F1: HMX/TATB/PKHJ (66,3/30,5/3,2)	F2: HMX/TATB/technoflon (65/30/5)
e_{50} (mm)	< 1	1,482	1,880

- ✓ When HMX wt% increases, initiation is easier (e_{50} higher)
- ✓ F2 is easier to initiate than F1 → influence of the binder nature



Conclusion and Prospects

- A cost-effective DCA synthesis (TATB precursor following Ott route) was optimized and developed on the kilogram scale. A first estimation of TATB cost reduction was about -30% .
- New TATB/HMX formulations using different kind of binder and up to 65wt% HMX (30wt% TATB) were processed.
- The behavior of the formulations towards impact, combustion, friability and small-scale gap test is acceptable
- Scale-up of nitration (to TNDCA) and amination (to TATB) will be performed as futur work
- 20kg of the two studied formulations will be processed and fully characterized (mechanical properties and energetic performances)

A MEMBER OF

