

# Investigation into the 20mm PGU-27 Bullet Crimp

Contract with:  
Headquarters

Warner Robins Air Logistics Center  
Robins Air Force Base Georgia  
Contract No. FA8520-090D-0006


---

**Presented by:**

**Ron Hopkins**  
**Staff Engineer**  
**General Dynamics Armament and Technical Products**  
**Williston, Vermont USA**  
**802-662-6213**                      **[rhopkins@gdatp.com](mailto:rhopkins@gdatp.com)**

# Background


- 20mm cases have experienced case neck separation (CNS)
- Hypothesis: A lower bullet pull requirement may reduce the occurrence of CNS
- Current requirement: 1100 to 2800 pounds
- Our challenge: Evaluate reducing the minimum bullet pull to 990 pounds (-10%)

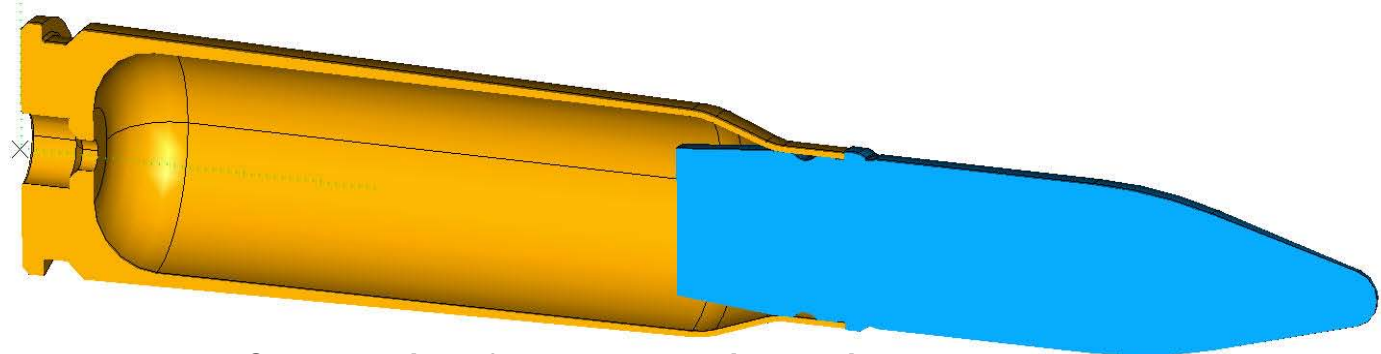

Cross-section of PGU-27 round in un-crimped state

# Empirical Bullet Pull Data



- Empirical bullet pull data with Loctite sealant
  - Average bullet pull load (BPL) of 1628 lb
  - Average bullet groove crimp diameter of 0.768"

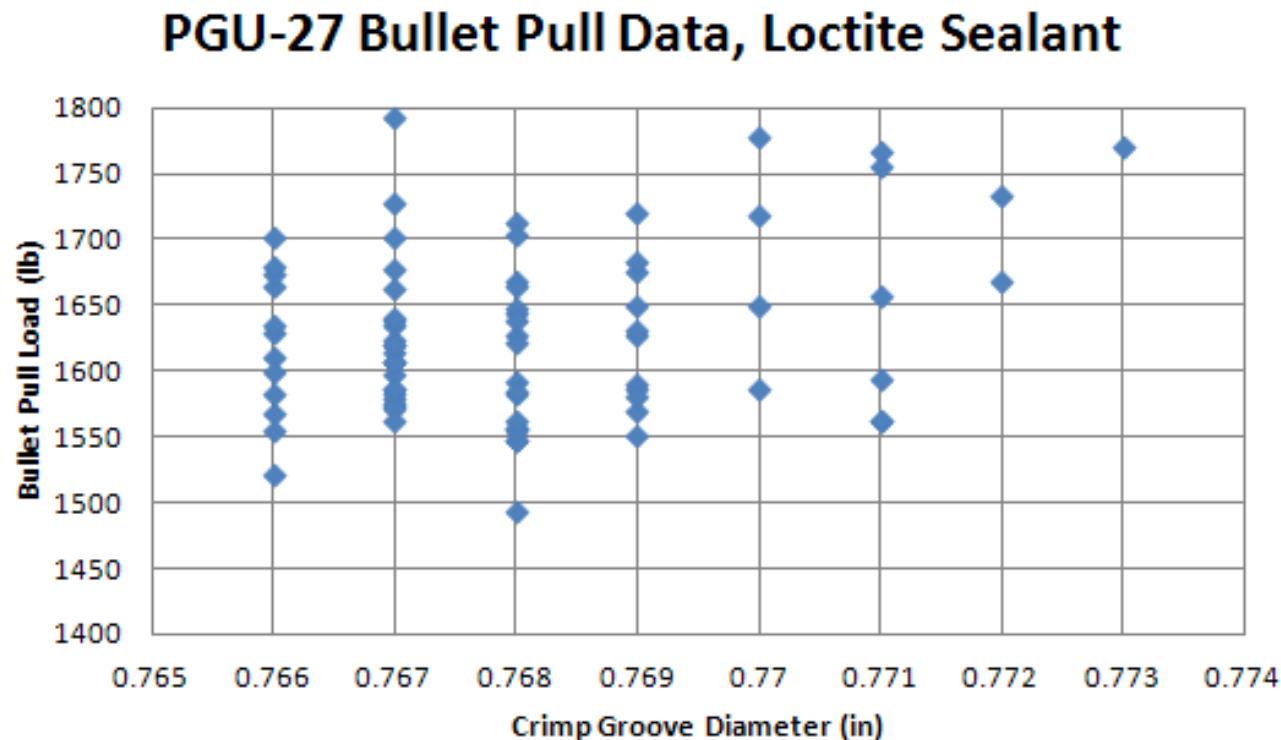

# Friction Study, PGU-27

- Determine relationship between BPL and friction for PGU-27
  - maximum case neck thickness
  - nominal bullet groove depth
- Friction coefficient of 0.05 results in:
  - BPL of 1675 lb
  - Post crimp groove OD of 0.7684"

**Effect of Friction Between Bullet and Case**  
PGU-27 MMC (.77" bullet OD, .028" case neck wall thickness)

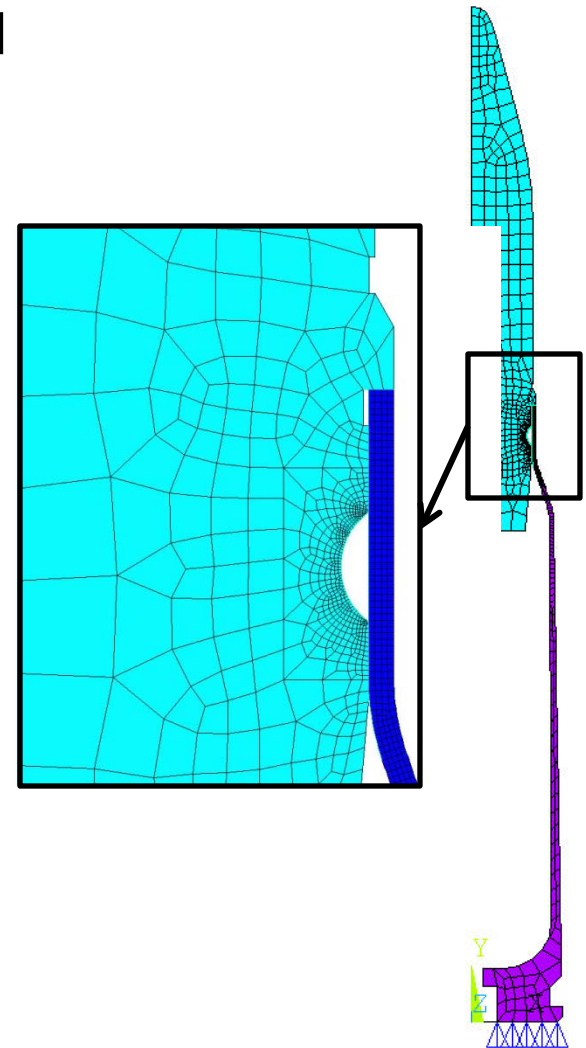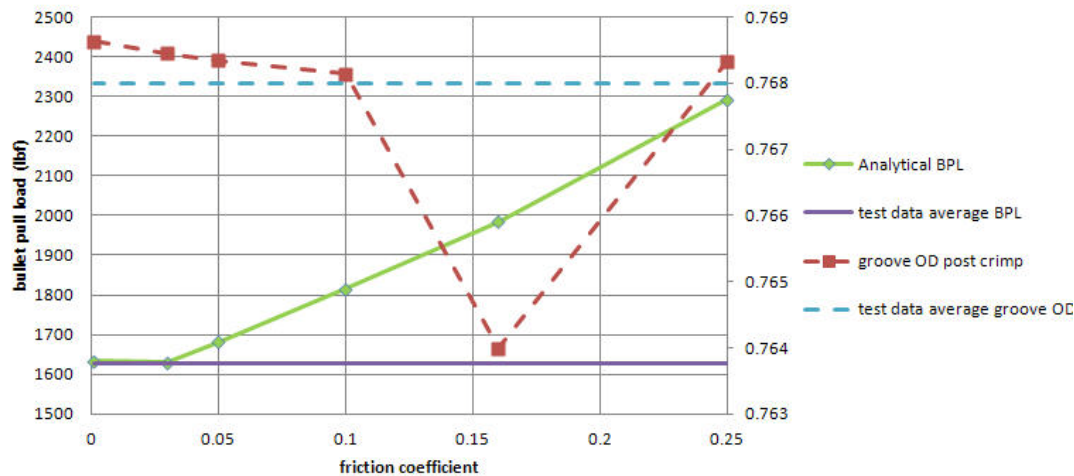


# Analysis Process Overview

- Data Collection Dummy Round (DCDR) measured round acceleration within gun and feed systems (see Presentation 14019)
- Reverse engineered loads which produce measured acceleration were computed based on:
  - Transfer functions from correlated finite element model (FEM) of DCDR
  - Support conditions of round during peak measured acceleration
- Nonlinear transient analysis performed using derived loads, key output is:
  - Bullet displacement relative to case
  - Case plastic strain




# DCCR Accelerations

- Peak round acceleration occurs when round within gun housing
- Within gun housing, round restrained by bolt and ID of gun housing – approximates cantilever restraint at base of round

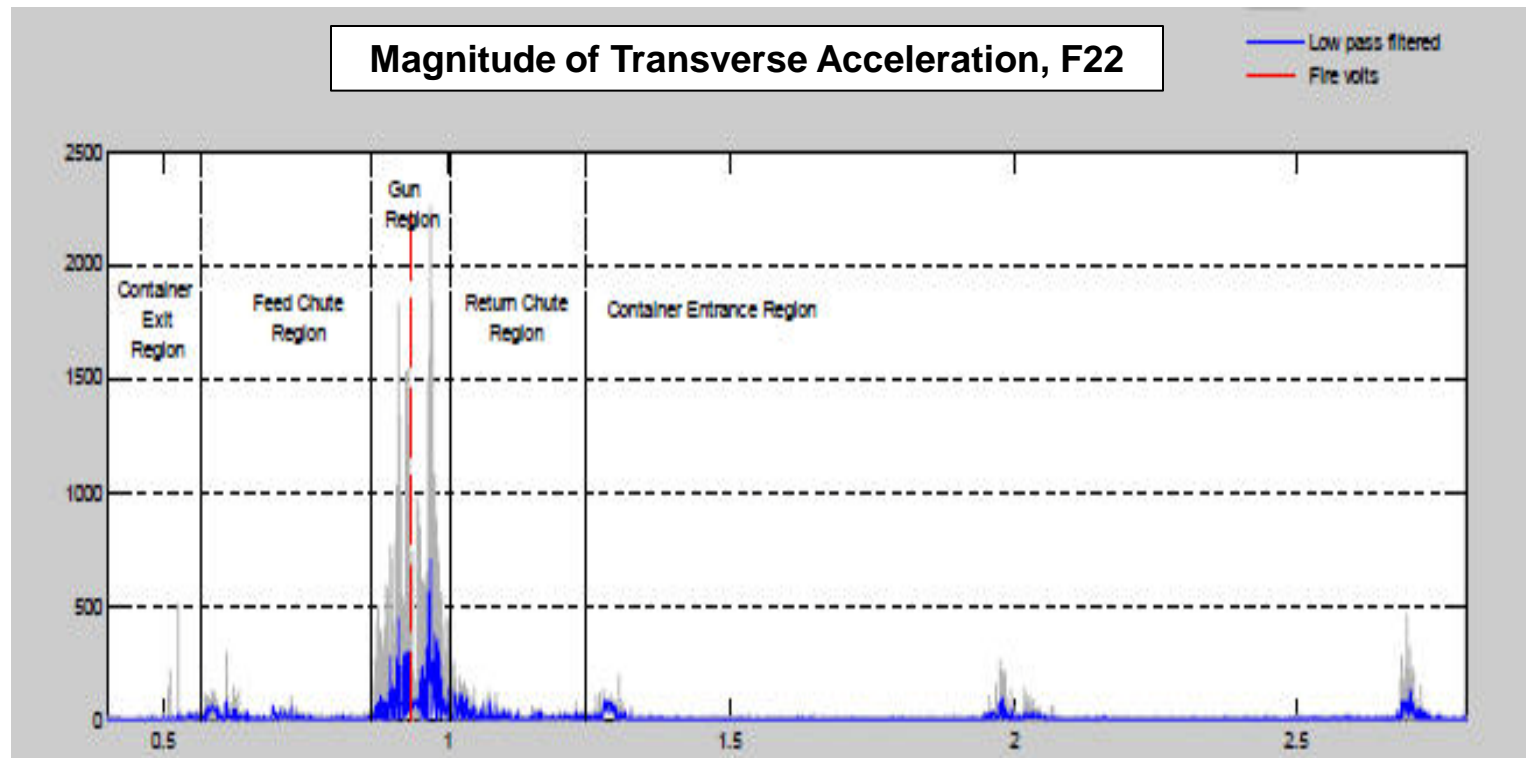



# From Response to Load

- DCDR measured acceleration is result of unknown external load applied to round and **cannot** be applied as external load
- Must determine unknown external load which produces measured acceleration
- Means to compute load is:
  - Divide Fourier Transform of DCDR accelerations by DCDR transfer functions
    - DCDR transfer functions computed from correlated FEM of DCDR
    - Cantilever support condition included in transfer functions
  - Compute Inverse Fourier Transform of quotient
- Result is “unknown” base acceleration load

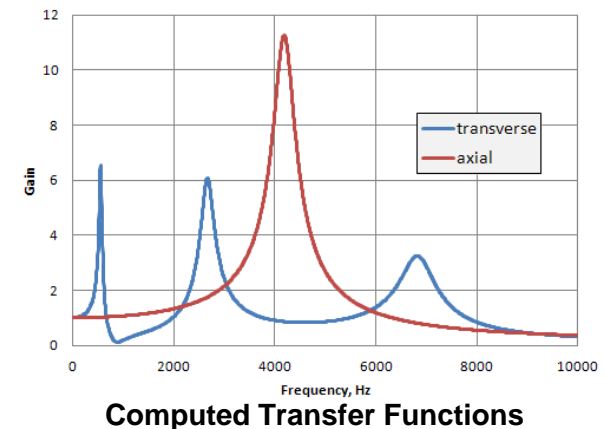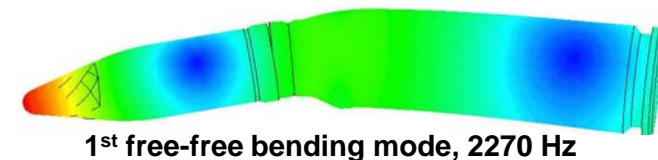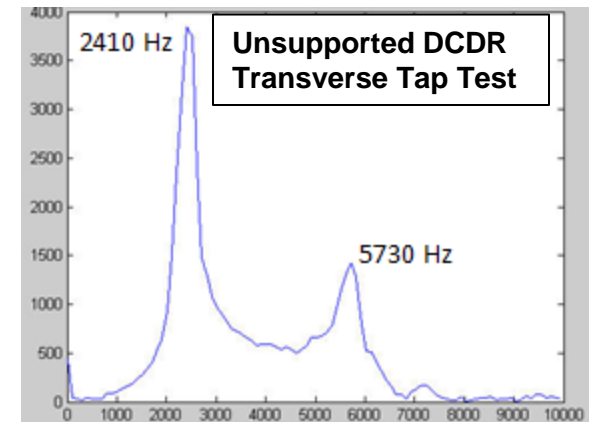

# DCCR Base Accelerations


- Axial and transverse derived base acceleration and measured DCCR acceleration

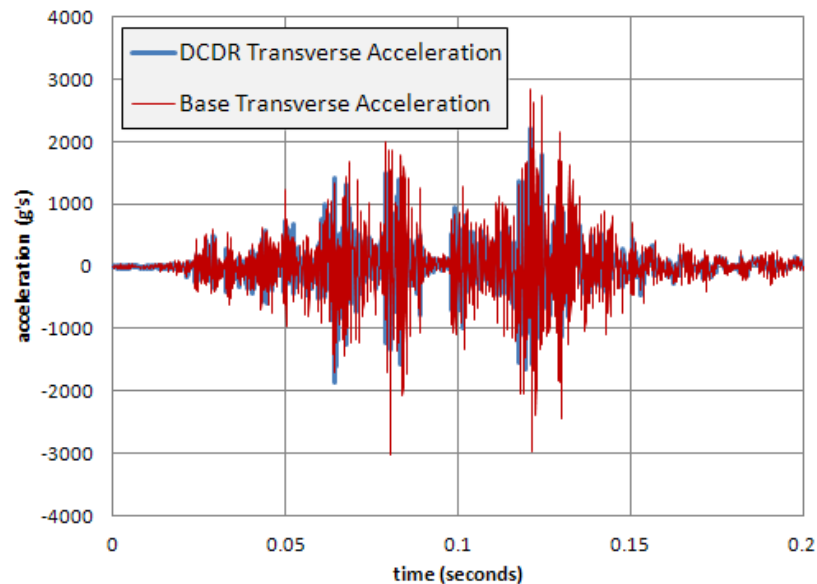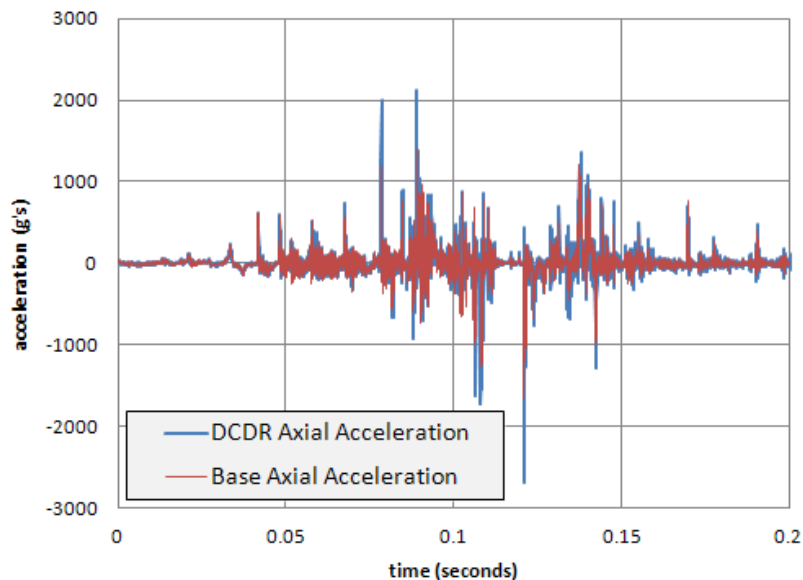





# PGU-27 Response to Base Accelerations

- Transient analysis in ANSYS
  - Nonlinear brass properties
  - 3-D surface contact
  - Plane of symmetry
- 1100 lb BPL FEM
  - Case neck thickness of 0.023"
  - Bullet groove depth of 0.028"
- 990 lb BPL FEM
  - Case neck thickness of 0.022"
  - Bullet groove depth of 0.026"
- First load step applies crimp load
- Second load step removes crimp load
- Subsequent load steps apply derived load

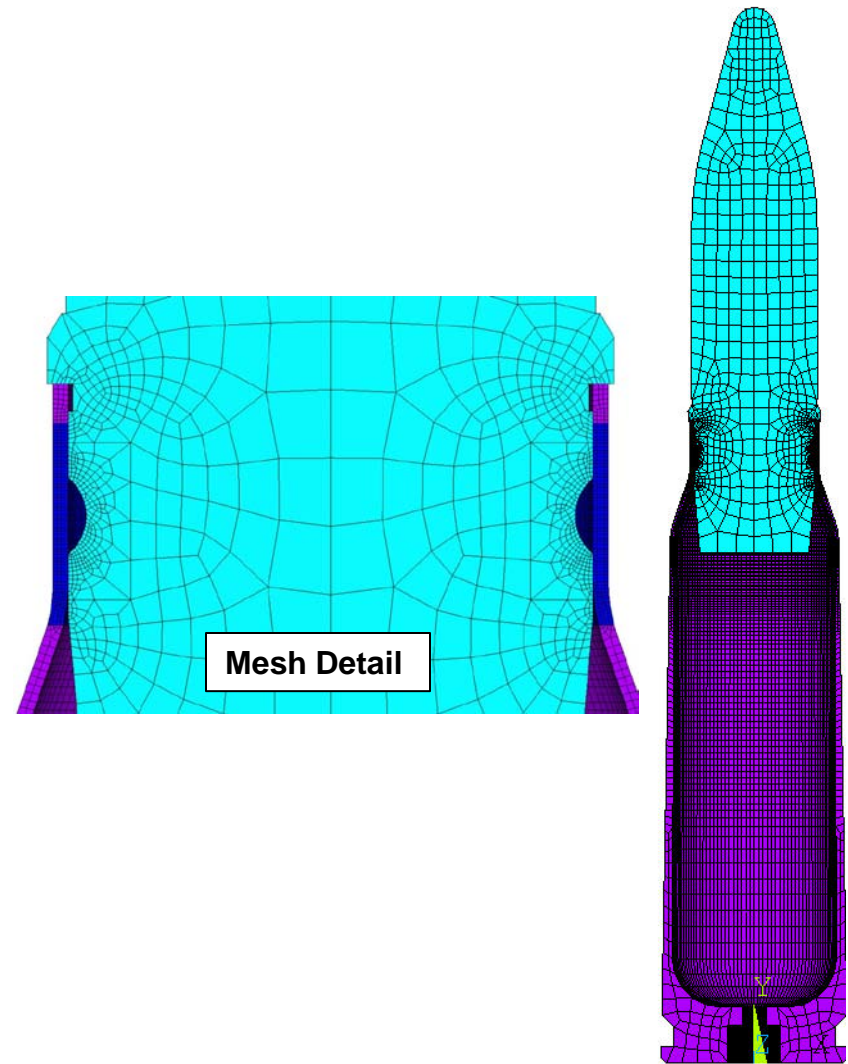



# Displacement at Minimum BPL (1100 lb)

- Peak axial separation is .023" – due to load round sees in gun housing
- Free vibration response at end shows bullet returning to post crimped position – no permanent bullet offset

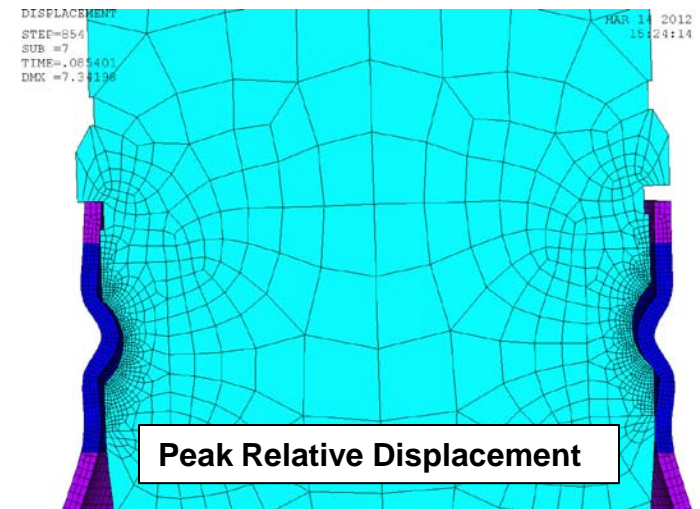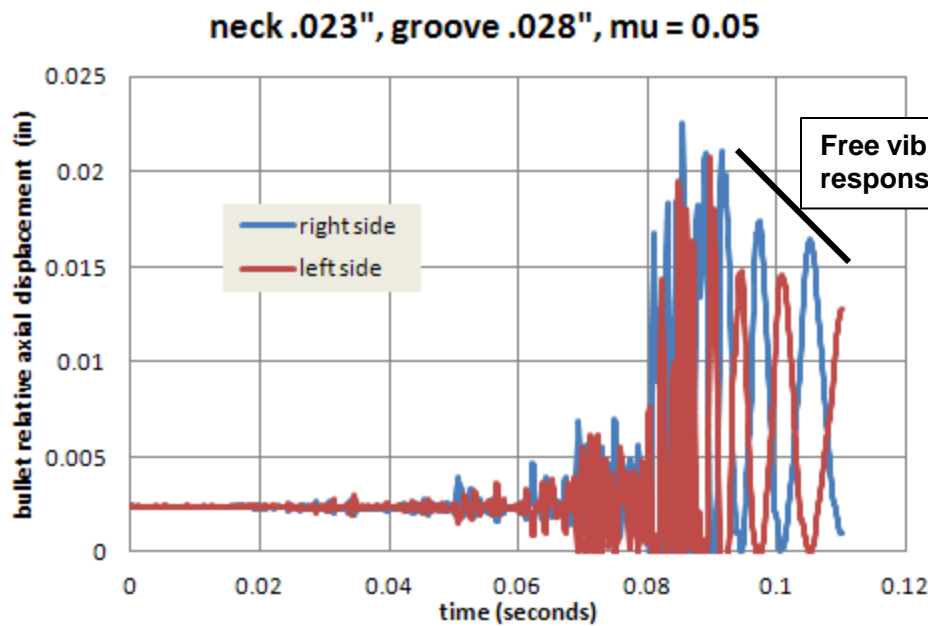


# Plastic Strain at Minimum BPL (1100 lb)

- Plastic strain due to crimping process is 32%
- Plastic strain after exposure to round handling loads is 37%

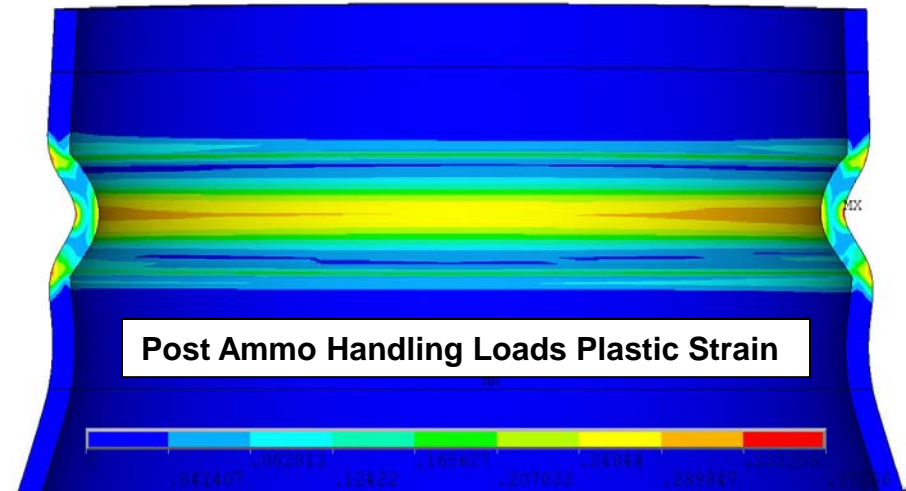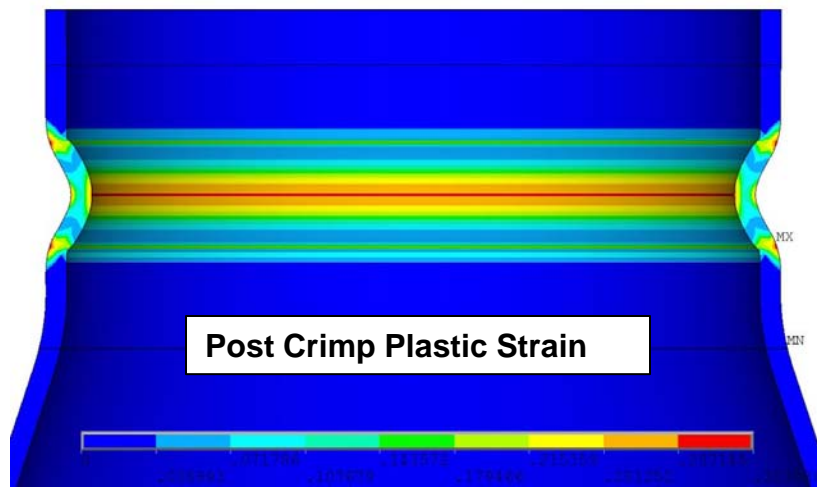


# Displacement at 90% of Minimum BPL

- Peak axial separation is .023" – due to load round sees in gun housing
- Free vibration response at end shows bullet returning to post crimped position – no permanent bullet offset


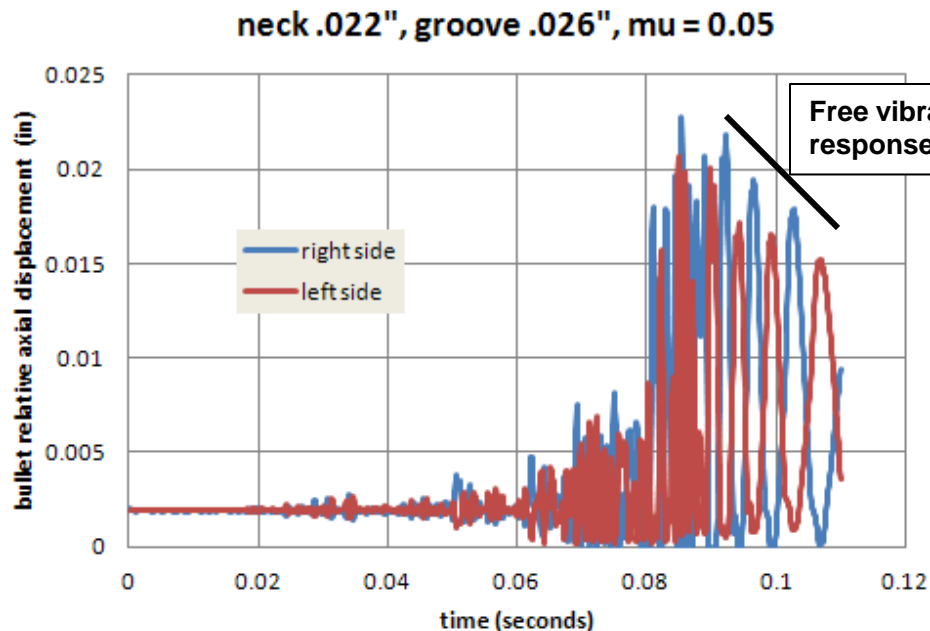


DISPLACEMENT  
STEP=854  
SUB =7  
TIME=.085401  
DMX =7.32746

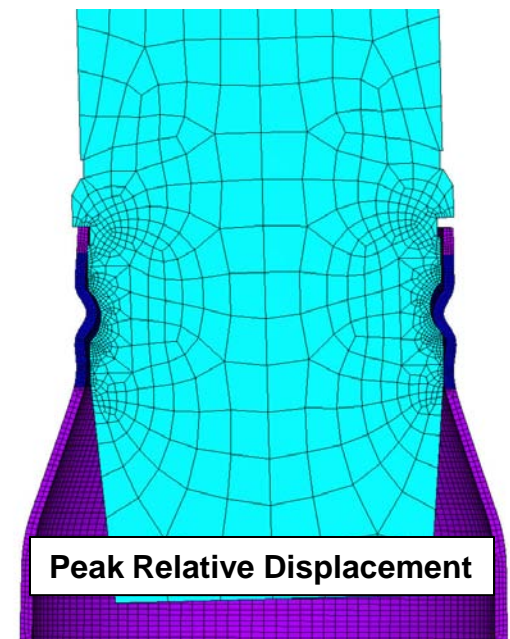

# Plastic Strain at 90% of Minimum BPL

- Plastic strain due to crimping process is 31%
- Plastic strain after exposure to round handling loads is 36%

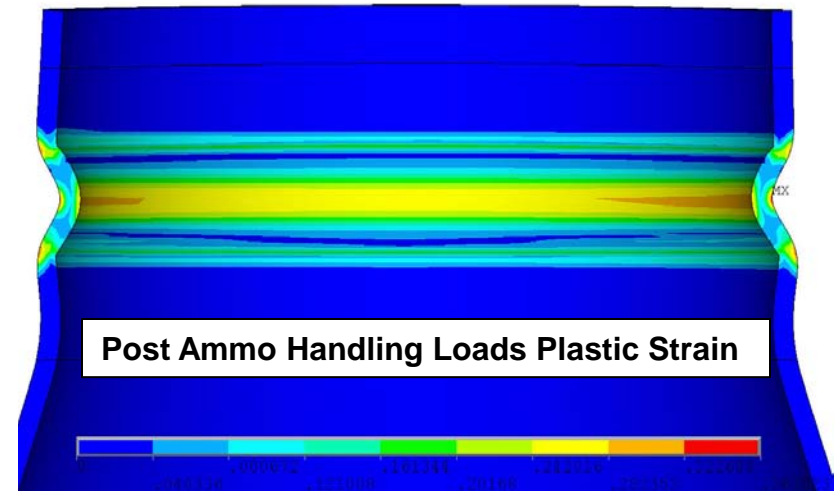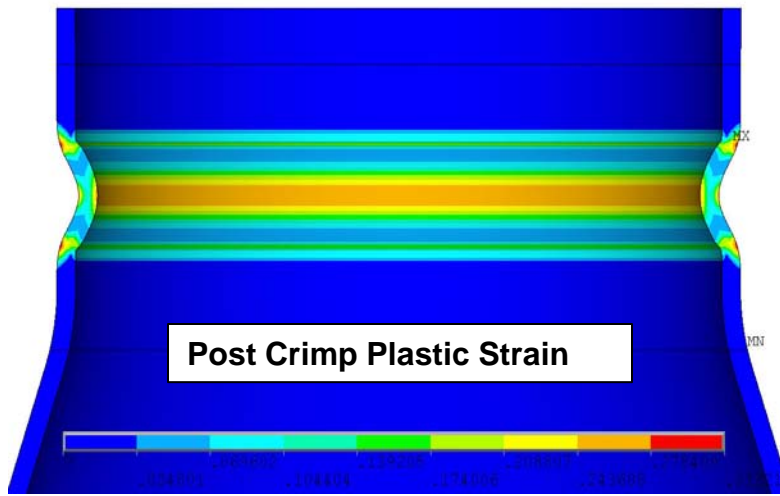

# Summary

---

- Rigorous analysis performed to evaluate relationship between BPL and capability of case to restrain bullet as PGU-27 round travels through various M61 gun systems
- Correlation study performed to establish friction coefficient of 0.05 between bullet and case with Loctite sealant
- Current bullet pull requirement (1100 lb to 2800 lb) adequately restrains the bullet for measured round accelerations
- Analysis results support a reduction of minimum bullet pull load from 1100 lbs to 990 lbs
  - Bullet control by case not compromised during exposure to round handling load
  - Based on evidence that current minimum BPL results in adequate bullet control in field