


FACULTY OF MILITARY TECHNOLOGIES
UNIVERSITY OF DEFENCE BRNO
Czech Republic Armed Forces

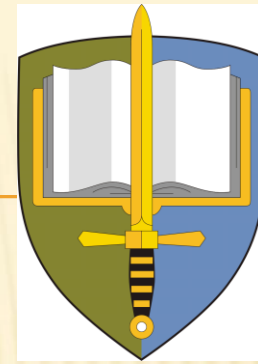

INSENSITIVE MUNITIONS &
ENERGETIC MATERIALS TECHNOLOGY SYMPOSIUM
OCTOBER 7-10, 2013
SAN DIEGO, CA, USA

ANALYSIS OF DOUBLE BASE PROPELLANTS SERVICE LIFE RELATING TO MECHANICAL PROPERTIES IN EXTREME CLIMATIC CONDITIONS

Authors:

František KREJČÍŘ

Pavel KONEČNÝ

INTRODUCTION

Goals of this work were

- ❖ to investigate changes in double base (DB) propellants over ageing and
- ❖ to determine significance of nitrocellulose (NC) chain decomposition for evaluation of DB propellants service life.

Reasons for this research:

1. DB propellants are long term stored.
2. DB propellants are exposed to various temperature conditions when stored in field storages (e.g. in extreme climate zones).
3. Polymer NC is as a binder of DB is liable to relatively fast decomposition.
4. DB propellants markedly change its mechanical properties over operational temperature range.

USED METHODS

- ✘ Artificial ageing – simulation of time-temperature loading during storage.
- ✘ Size-exclusion chromatography (SEC) - determination of nitrocellulose polymer chain decomposition characteristics.
- ✘ Uniaxial compression and tensile tests - determination of changes of basic mechanical properties.
- ✘ Dynamic mechanical analyses – determination of transition temperatures and its shift.
- ✘ Reaction kinetics analyses – determination of predictive decomposition models.

TESTED DB PROPELLANTS

- ❖ Type 1 – standard DB made by Explosia a.s. (Pardubice, CZE).
- ❖ Type 2 – with alternative less toxic auxiliary plasticizer.
- ❖ NC properties – 12% nitrogen, wood cellulose.
- ❖ Extruded grains – 30 mm in diameter, 300 mm long.


Propellant	Type 1	Type 2
Nitrocellulose	55.7 %	55.7 %
Nitroglycerine	28.3 %	26.0 %
Dinitrotoluene	8.5 %	
Alternative plasticizer		11.5 %
Ethyl centralite	2,9 %	2.9 %
Catalyzers	4,0 %	4.0 %

ARTIFICIAL AGEING


- ❖ Conditions set with respect to AOP-48.
- ❖ Ageing at two temperatures: 65 °C and 80 °C.
- ❖ Grains loaded in polymer coated aluminum bags.
- ❖ Ageing periods accordingly to Arrhenius equation (and known kinetic parameters of -NO₂ group decomposition):

Period of storage at 25 °C [years]	Corresponding period of artificial ageing at	
	65 °C [days]	80 °C [days]
5	32.4	5.3
10	64.9	10.6
15	97.3	15.9
20	129.7	21.2

SEC CHROMATOGRAMS

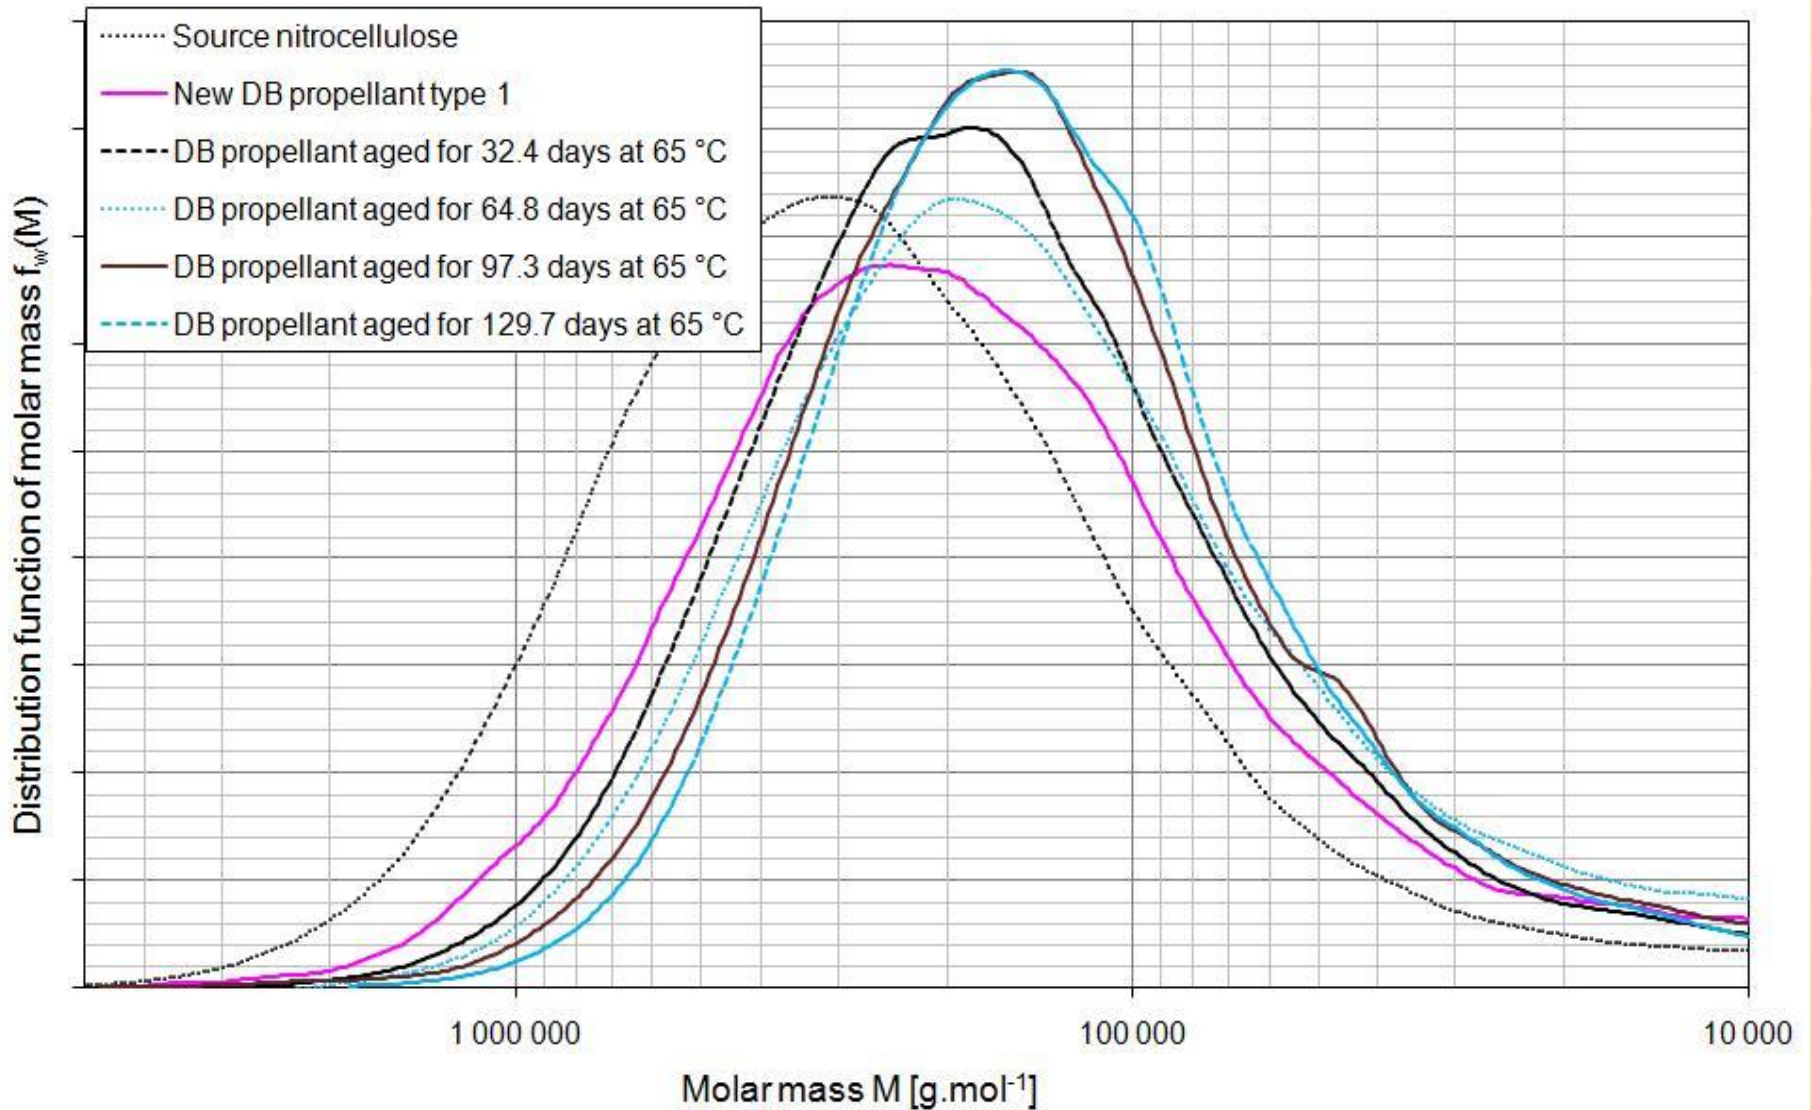

AVERAGE MOLAR MASS OF NITROCELLULOSE

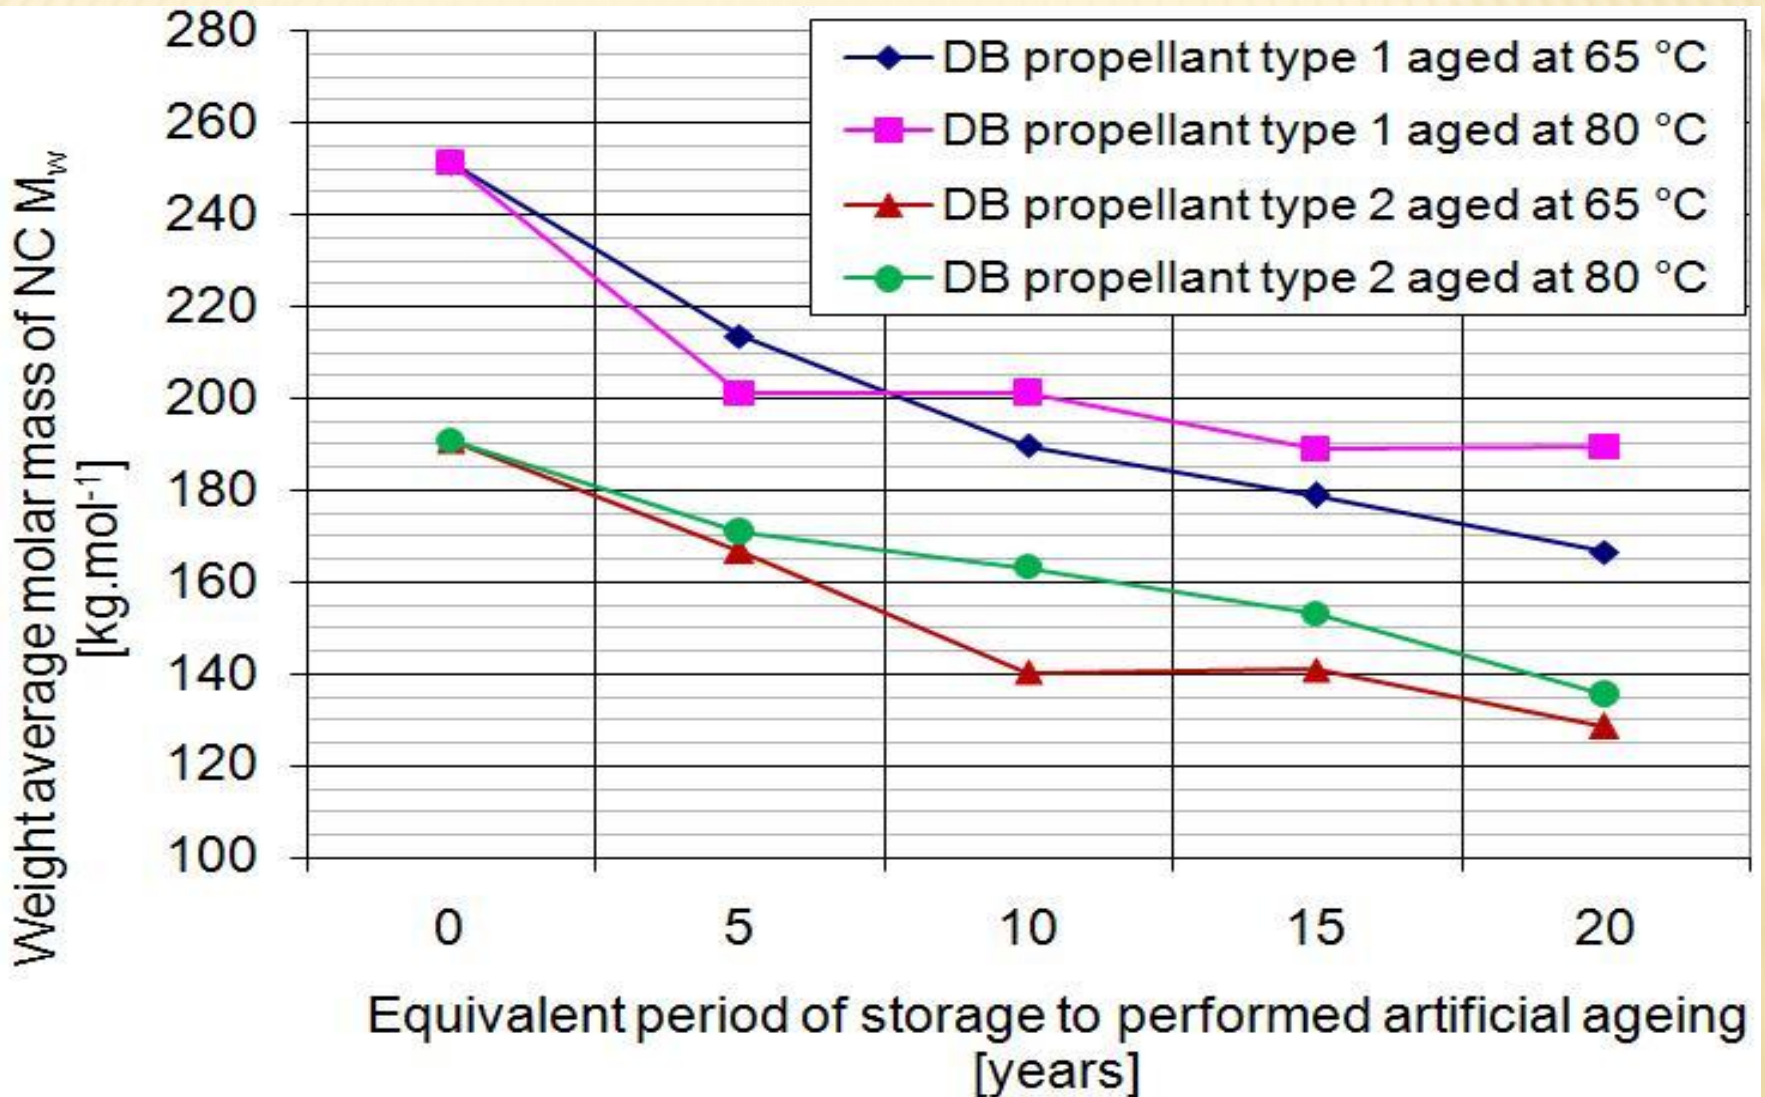

MODEL OF NITROCELLULOSE DECOMPOSITION

❖ Kinetic model of chain scission
 (solve rate constant from molar masses) $\frac{m}{M_n(t_i, T)} = \frac{m}{M_n(0)} + k_M(T)t_i$

❖ Arrhenius equation
 (solve activation energy from rate constant) $\ln k_{Mi}(T_i) = \ln A - \frac{E_a}{RT_i}$

Established kinetic parameters of decomposition in temperature range 65 °C to 80 °C:

		DB propellant type 1	DB propellant type 2
Activation energy E_a	[kJ.mol ⁻¹]	85	105
Frequency factor A	[-]	1,84.10 ³	3,28.10 ⁶

CHANGES IN MECHANICAL CHARACTERISTICS


Uniaxial tensile and compression tests:

change of ε_m measured at 21 °C (aged for 129.7 days at 65 °C)

- ❖ in compression -4 % and -6 %,
- ❖ in tension -7 % and +13 %.





Compression at break

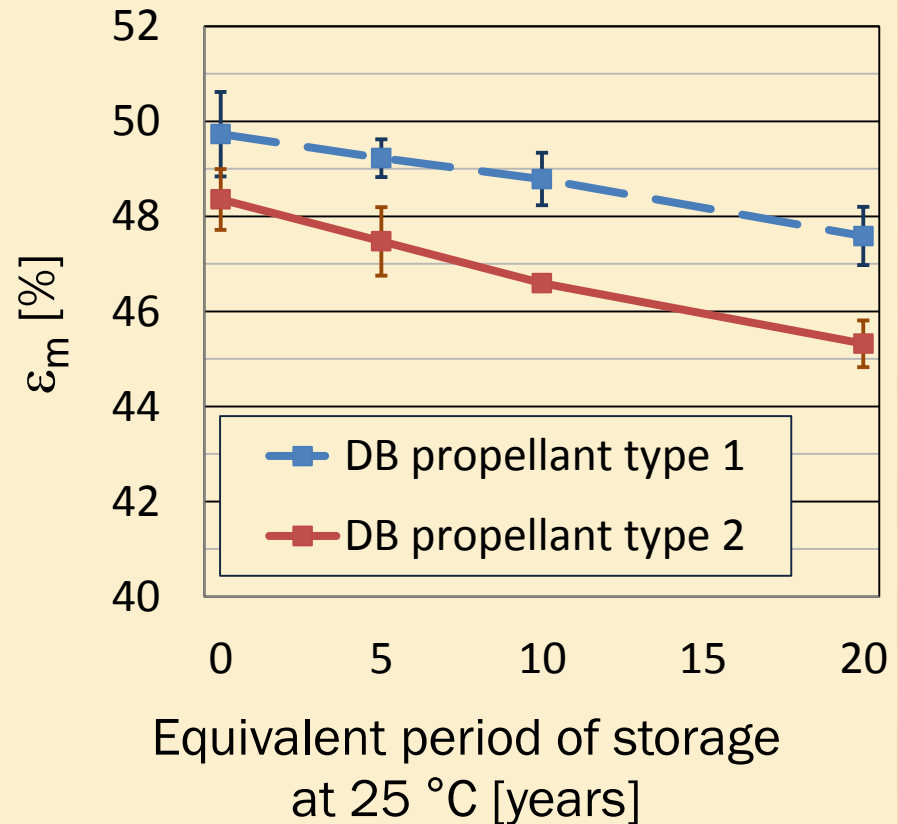

CHANGES IN MECHANICAL CHARACTERISTICS


Decrease of σ_m measured at 21 °C (aged for 129.7 days at 65 °C)

- ❖ in compression by 15 % and 18 %,
- ❖ in tension by 16 % and 9 %.

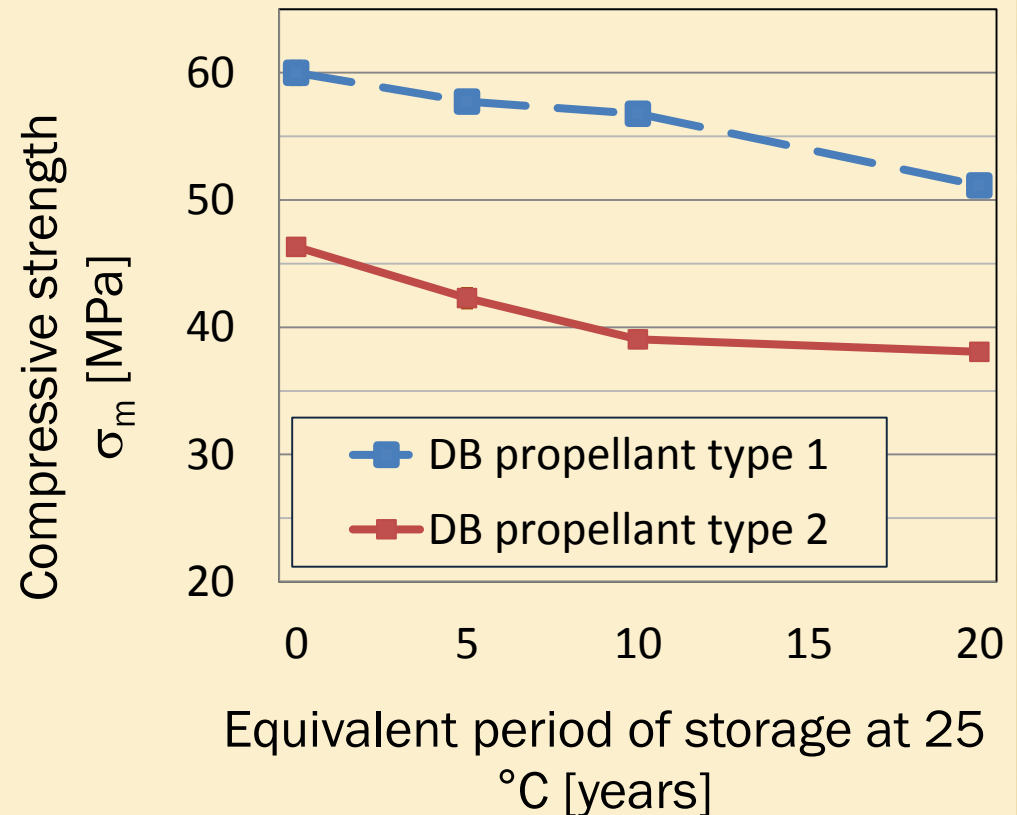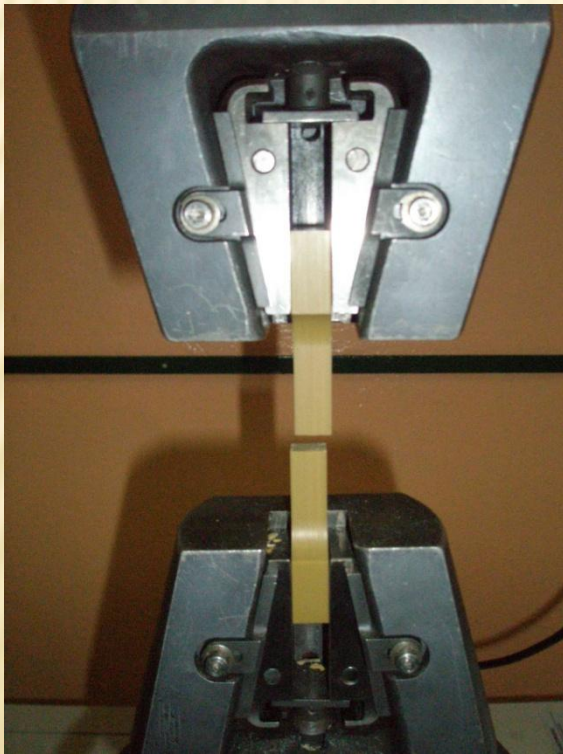


DYNAMIC MECHANICAL ANALYSES

- ❖ T_α lowers during ageing 46 °C \rightarrow 42 °C for both DB.
- ❖ T_β does not show any trend -32 °C, -37 °C for DB type 1, 2.

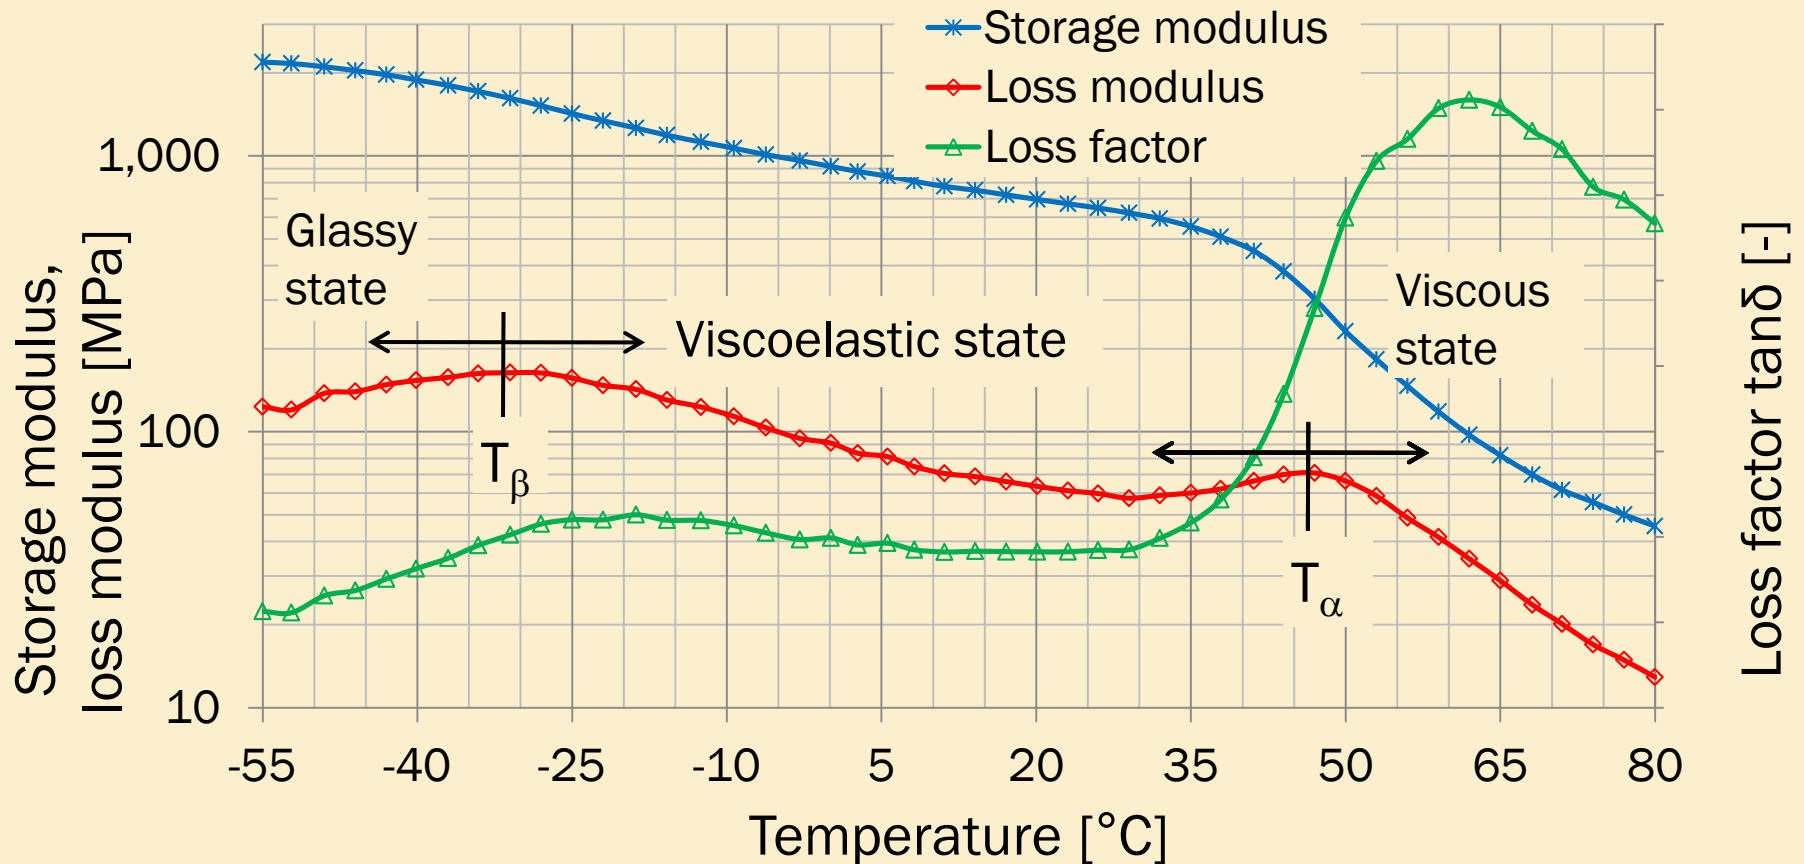

MODEL OF NITROCELLULOSE DECOMPOSITION


Predictive model of decomposition NC for DB type 2 stored at constant temperatures

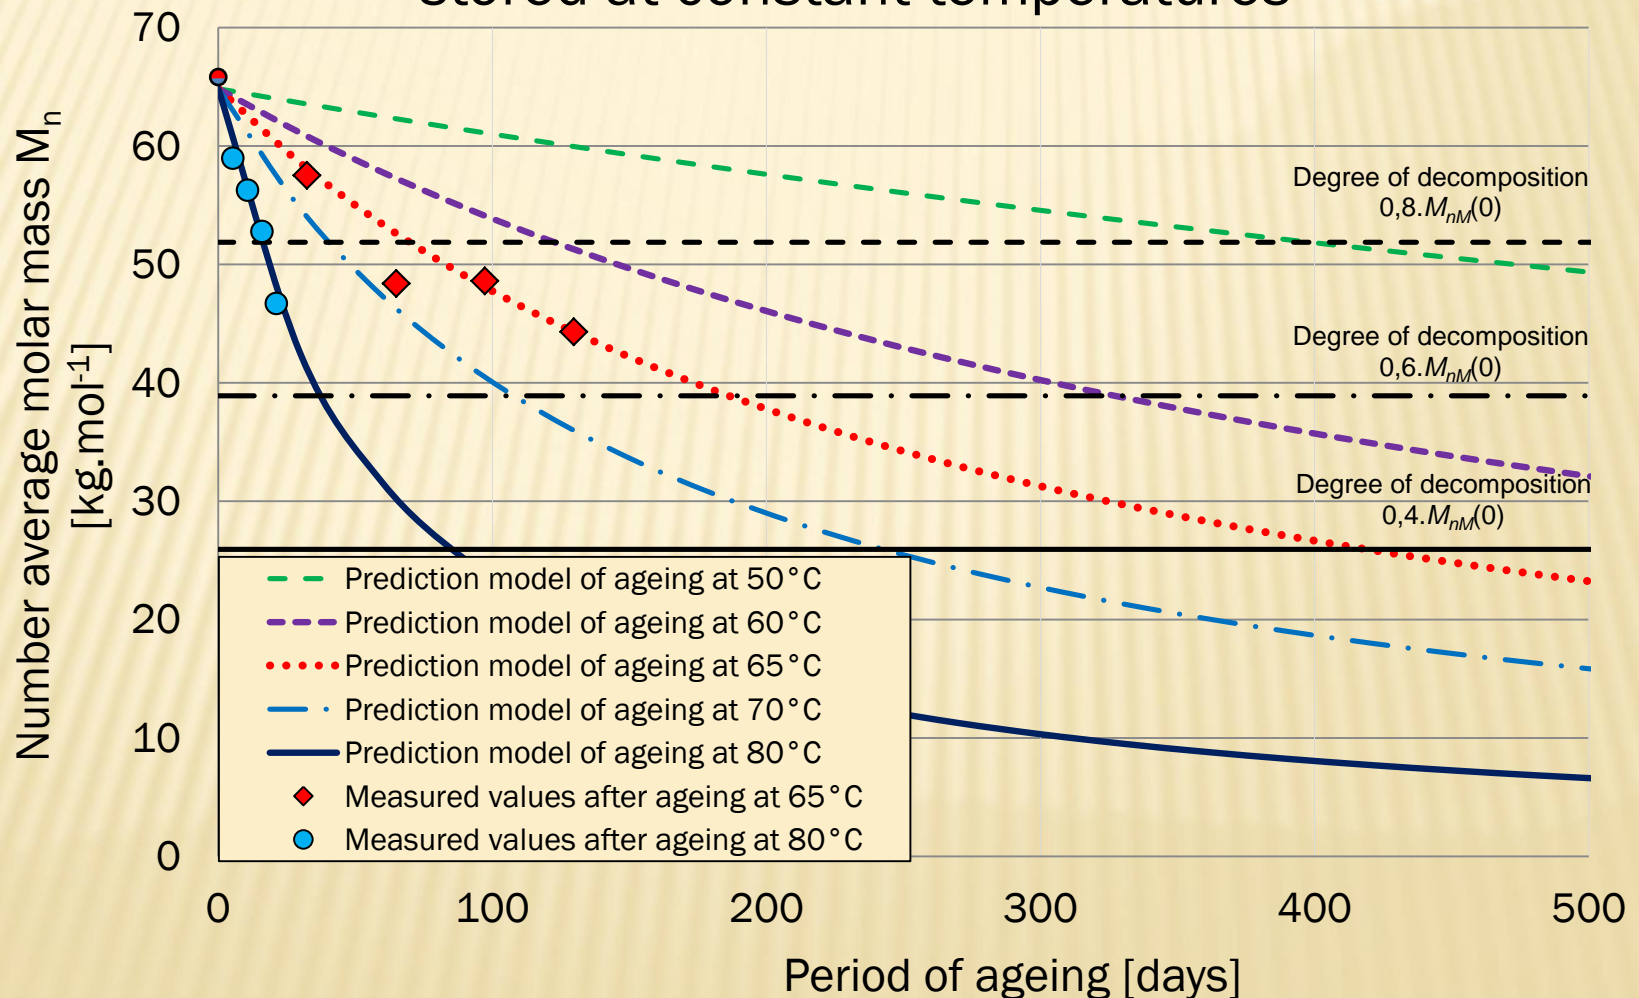

MODELING OF FIELD STORAGE CONDITIONS

- ❖ STANAG 2895 determines climatic categories and time-temperature loadings.

Temperature at storage [°C]	Period of temperature loading during one year [hours]
71	5,2
69	26,2
67	49,5
65	77,4
63	108,7

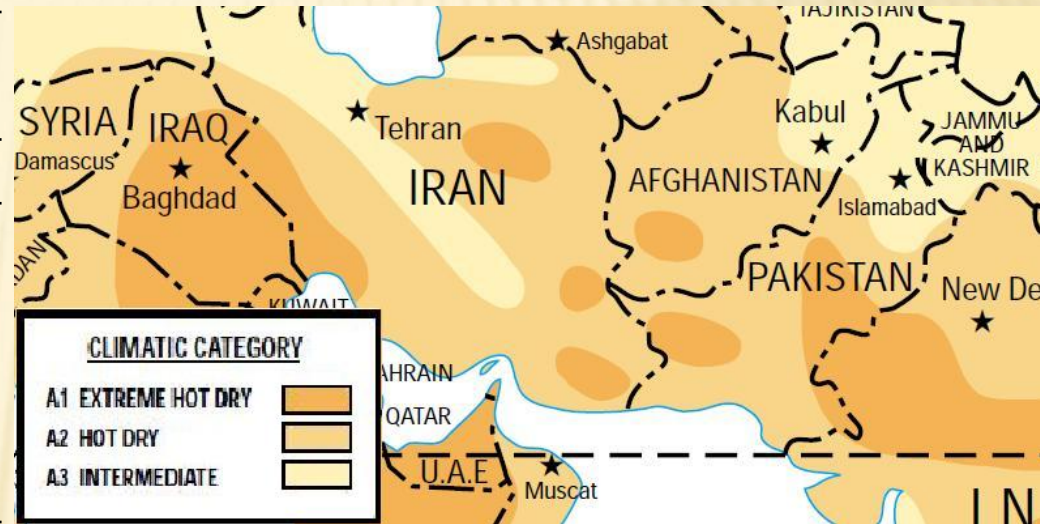


- ❖ Data were used to establish predictive model based on Arrhenius equation in form:

$$M_n(t_n, T_n) = M_n(0) - \sum_i^n \left(M_n(t_{i-1}, T_{i-1}) - \frac{m}{\frac{m}{M_n(t_{i-1}, T_{i-1})} + A_i \exp\left(-\frac{E_{ai}}{RT_i}\right)} t_i \right)$$

NC CHAIN DECOMPOSITION IN FIELD STORAGE

Service life related to NC chain decomposition:

- ❖ 9,5 years and 11,5 years for DB type 1 and type 2 in climate category A1 (limiting condition $0,4 M_n(0)$)

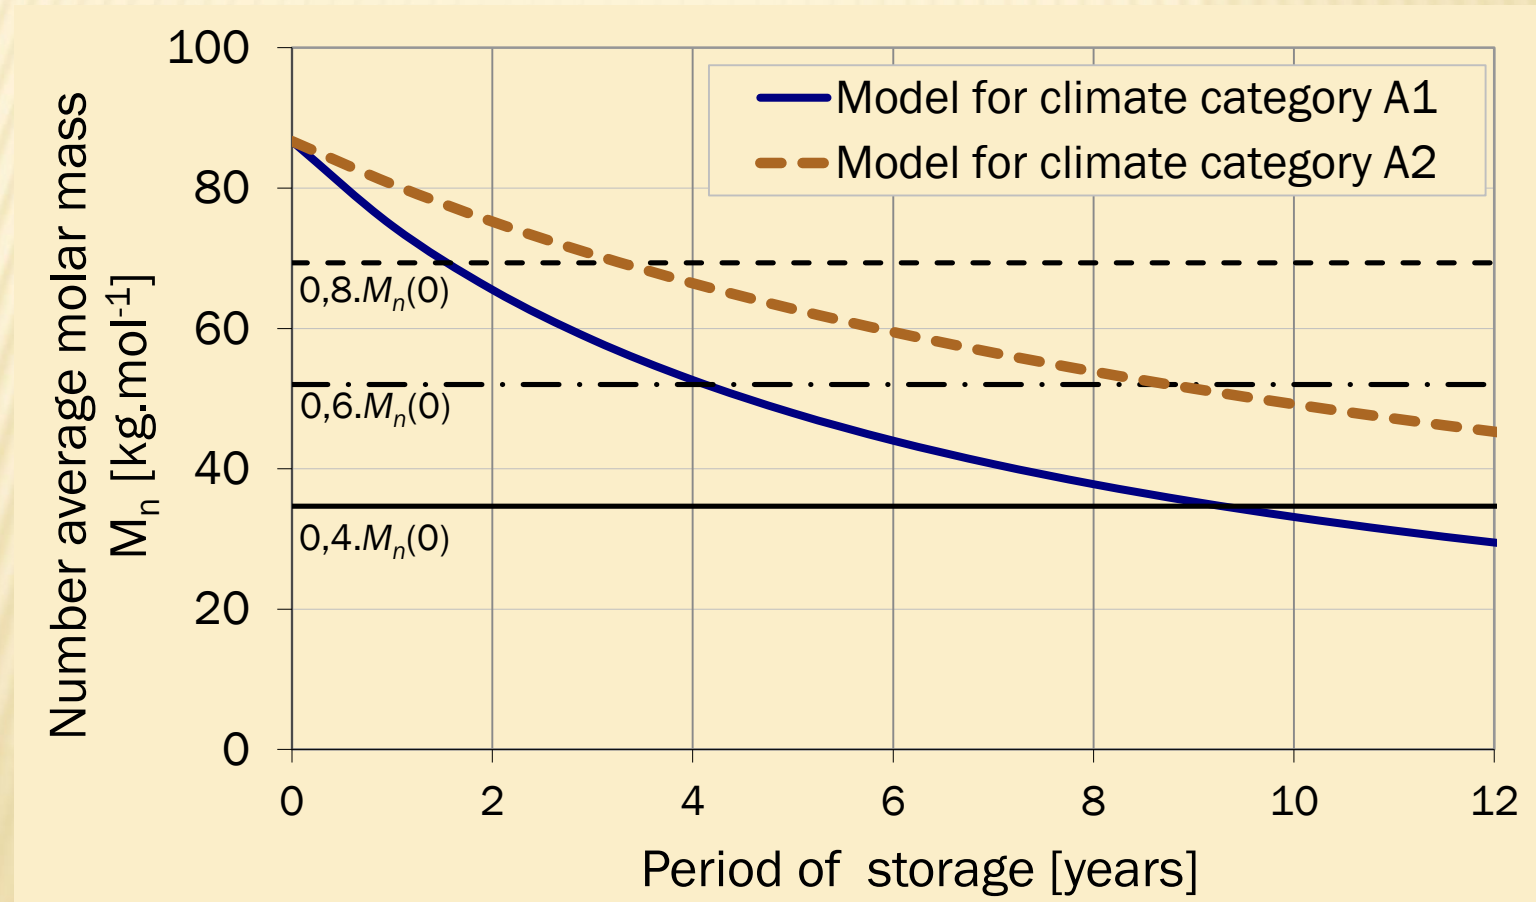

CONCLUSION

Performed artificial ageing of two types of DB propellant at 65 °C during 129.7 days leads to decrease of values of chemical and mechanical properties:

- ❖ M_n by 34 % and 33 %
- ❖ σ_m at 21 °C in compression by 15 % and 18 %
- ❖ ε_m at 21 °C in compression by 4 % and 6 %
- ❖ T_α by 4 °C (46 °C -> 42 °C)
- ❖ E_a of NC chain scission at temperature range 65 °C to 80 °C were established to be 85 kJ.mol⁻¹ and 105 kJ.mol⁻¹.

CONCLUSION

Described processes and changes lead to:

DB propellants tend to get markedly softer at temperatures near upper operational limit (~ 50 °C) after ageing.

Service life of DB propellants related to NC decomposition and mechanical characteristics changes could determine overall service life.

Service life of DB related to M_n , when stored in field conditions in extreme climates, could be limited to ~ 10 years (accepted condition of limiting decomposition $0,4.M_n(0)$).

Thank you for your attention

Questions?